


**COMPACT FIXTURE SUPPORTS WITHOUT WASTE FITTINGS FOR RESIDENTIAL TYPE SIPHON JET WATER CLOSETS**

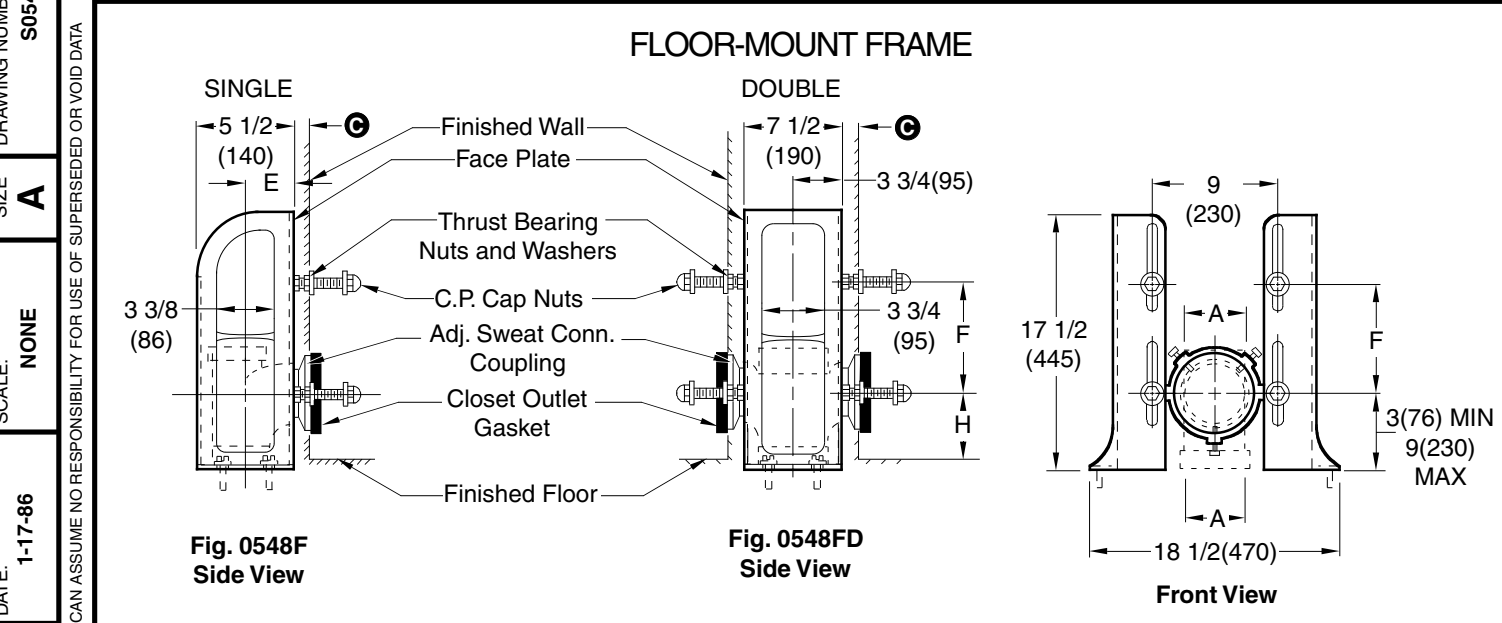

- Fig. 0548F-3 . . . 3"(80) Copper Sweat
- Fig. 0548F-4 . . . 4"(100) Copper Sweat
- Fig. 0548FD-3 . . . 3"(80) Copper Sweat

- NOTE:** Coupling should extend 5/16"(8) beyond finished wall.
- NOTE:** When using closet with bar hanger, add suffix-H to fig. numbers shown.
- NOTE:** See roughing-in table on reverse side for "F" and "H" dimensions and list of compatible fixtures. Double support for use with gravity flush tank type water closets only.
- NOTE:** Longer closet studs and couplings available when required.
- ▲ NOTE:** Back of fitting extend beyond frame 1/4"(6) for 4"(100) sizes. Recommend use with 2 x 8 studs only.

FIG.	A SIZE	E
0548F-3	3(80)	4(100)
0548F-4	4(100)	5(125)

⊙ 1/2"(13) MIN to 1 1/4"(32) MAX as regularly furnished

**INSTALLATION INSTRUCTIONS**

- A. The center of the stack should be located by the "E" dimension shown on the table. "E" dimension for 0548FD is 3 3/4"(95).
- B. To determine the height of the stack in relation to the finished floor, find specific "H" dimension to be used, then measure down from centerline of closet outlet 2 15/16"(75) for 3"(80) size, and 3 15/16"(100) for 4"(100) size. Fig. 0548FD 3"(80) size only.
- C. Make up stack connection.
- D. Attach copper fitting adaptor to the fitting and lock in place.
- E. Assemble the face plates temporarily to the fitting, mark the location of the bolt holes in the slab, and then secure face plates to the floor.
- F. Face plates are fastened to the arms of the adaptor by means of the fixture studs, nuts and washers provided.
- G. Insert the coupling into the fitting and adjust it to extend 5/16"(8) beyond finished wall, then solder in place.
- H. Assemble the bearing nuts and washers to the fixture supporting studs. The fixture studs should extend 2 1/4"(57) beyond finished wall.
- I. Adjust bearing nuts so that washers extend 1/16"(2) beyond finished wall.
- J. After wall is erected, remove any plaster grout touching the fixture studs, bearing nuts, washers and coupling.
- K. Place gasket in closet recess and set closet on studs protruding from wall making sure that closet outlet is centered on coupling.
- L. Place fiber washers on studs. Apply the two bottom and top left cap nuts, tighten securely. Apply the top right cap nut hand tight and snug up 1/4 turn with wrench.

**NOTE:** When installing closet with bar hanger support follow the same instructions as above, except that the hanger plate should be mounted on the top fixture studs. Adjust the top bearing nuts so that the face of the hanger extends 1/16"(2) beyond the finished wall, then lock in place with hex nuts.

**NOTE: SEE REVERSE SIDE FOR ROUGH-IN TABLE.** **NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S0548F

SIZE A

SCALE: NONE

DATE: 1-17-86

APPROVED BY: SB

CHECKED BY: JD

DRAWN BY: CM

FIGURE NUMBER 0548F

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
G	1-27-06	Revised Note & Removed Note	RN	CL			<b>0548F</b>
F	8-26-05	Revised Note	TBW	CL			
E	05/21/01	Deleted 2" x 4"	JJ	CL			
D	3-26-97	Added -# after Fig. No.	CMD	BS			

D



**JAY R. SMITH MFG. CO.®**  
 DIVISION OF SMITH INDUSTRIES, INC.  
 POST OFFICE BOX 3237  
 MONTGOMERY, ALABAMA 36109-0237 (USA)  
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



MEMBER OF:

LOCATION

# ROUGH-IN TABLE FOR RESIDENTIAL WATER CLOSETS

## DIMENSION "H" ROUGH-IN HEIGHTS

FIXTURE MFG.	NAME	NUMBER	F	H
AM. STD.	GLENWALL	2093.100	7 1/2 (190)	4 1/8 (105)
CRANE	REXMONT	3-217	7 1/2 (190)	4 (100)
ELJER	WALFORD	091-7925, 7926, 7928, 7933	7 1/2 (190)	6 3/4 (170)

**NOTE:** The rough-in dimensions listed on this drawing are based on current information available to Jay R. Smith by the fixture manufacturers. We recommend that you verify these dimensions with the fixture manufacturer. We will not accept responsibility for rough-in dimension changes by the fixture manufacturer.

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER  
S0500BSSIZE  
ASCALE:  
NONEDATE:  
1-24-86APPROVED BY:  
SBCHECKED BY:  
JDDRAWN BY:  
CM

0500 SERIES

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
D	1-27-06	Added NOTE to BS	RN	CL			0500 SERIES
C	8-26-05	Revised Table	TBW	CL			
B	8-1-96	Added Millimeters	EMB	BS			
A	7-20-93	Submittal Update	EMB	BS			