


NO-HUB VERTICAL OFFSET WASTE FITTING

FOR USE WITH FLOOR MOUNTED BACK OUTLET CLOSET

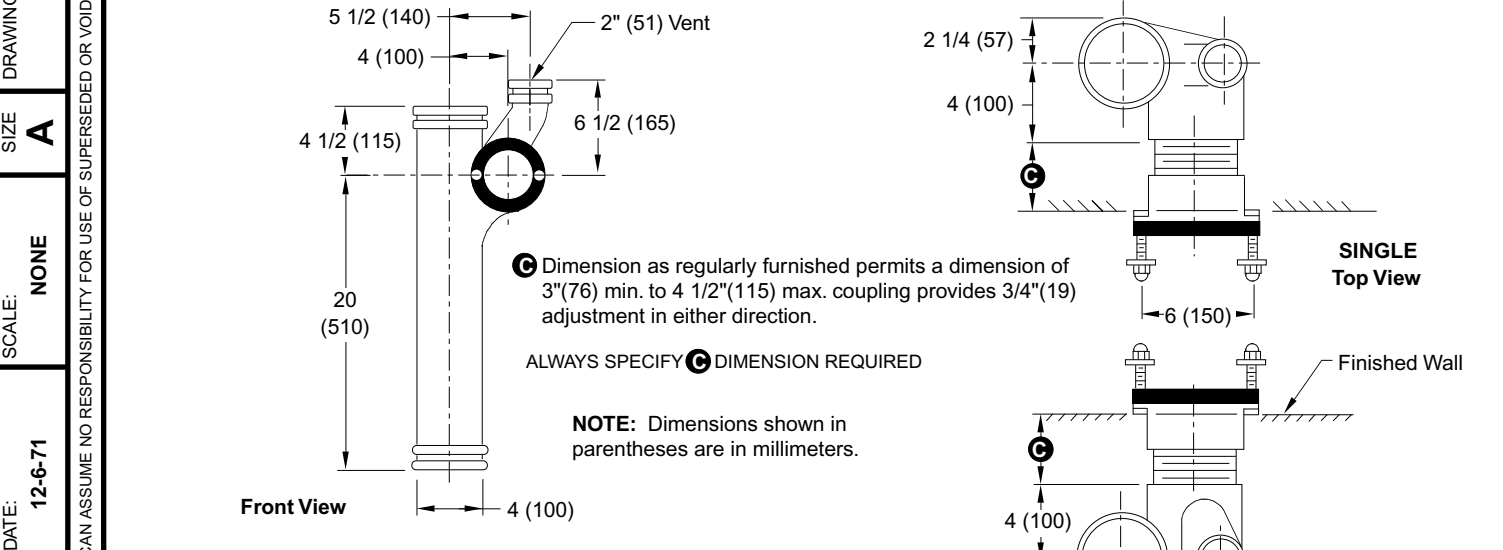

Ⓢ Dimension as regularly furnished permits a dimension of 3" (76) min. to 4 1/2" (115) max. coupling provides 3/4" (19) adjustment in either direction.

ALWAYS SPECIFY **Ⓢ** DIMENSION REQUIRED

NOTE: Dimensions shown in parentheses are in millimeters.

- Fig. 0688LY ... NO-HUB LEFT HAND LONG BARREL
- Fig. 0688RY ... NO-HUB RIGHT HAND LONG BARREL
- Fig. 0688DY ... NO-HUB DOUBLE LONG BARREL

Minimum **Ⓢ** dimension of 1" (25) available using special male end coupling (see type 2M below)

***NOTE:** Coupling should extend 5/16" (8) beyond finished wall.

The water closet gasket regularly furnished is made of molded neoprene and designed to fit water closet outlet dimensions and configurations shown in ANSI Standard A112.19.2M-1982, Figure 13B. If gasket is not found to be compatible to fixture due to nonconformance of said fixture to ANSI A112.19.2M, then fixture manufacturer shall be consulted for a suitable gasket recommendation. Jay R. Smith assumes no liability for connections to fixtures which do not conform to these standards.

DIMENSIONS ARE SUBJECT TO MANUFACTURER'S TOLERANCE AND CHANGE WITHOUT NOTICE

TYPICAL APPLICATION

OUTLET CONNECTIONS

NIPPLE LENGTHS AVAILABLE

NIPPLE LENGTH	MIN	Ⓢ	MAX
2 1/2 (64)	2 3/4 (70)	3 3/4 (95)	
*3 1/4 (83)	3 (76)	4 1/2 (115)	
4 1/2 (115)	4 1/4 (110)	5 3/4 (145)	
5 1/4 (135)	5 (125)	6 1/2 (165)	
6 1/4 (160)	6 (150)	7 1/2 (190)	
7 (180)	6 3/4 (170)	8 1/4 (210)	
8 1/4 (210)	8 (205)	9 1/2 (240)	
10 (255)	9 3/4 (250)	11 1/4 (285)	
12 (305)	11 3/4 (300)	13 1/4 (335)	
15 (380)	14 3/4 (375)	16 1/4 (415)	
18 (455)	17 3/4 (450)	19 1/4 (490)	

* Regularly Furnished

0688Y	B	4-12-96	Added Millimeters	EMB	BS	WEIGHT	VOLUME	FIGURE NUMBER
	A	10-12-94	Submittal Update	CMB	BS	POUNDS	CUBIC FEET	0688Y
REV.	DATE	DESCRIPTION	BY	CKD. BY				