



JAY R. SMITH MFG. CO.
 MEMBER OF ACORN'S FAMILY OF COMPANIES
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



MEMBER OF:

LOCATION

DRAWING NUMBER
s5572 (-BFP), 5573 (-BFP)

SIZE
A

SCALE:
NONE

DATE:
7-7-11

APPROVED BY:
CL

CHECKED BY:
CL

DRAWN BY:
TBW

5572 (-BFP)
5573 (-BFP)


WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

MILD CLIMATE ANTI-SIPHON SILLCOCK

BOX TYPE WITH CONCEALED HOSE CONNECTION DUAL CHECK VALVE - BACKFLOW PROTECTED

FUNCTION: For installation in interior and exterior wall locations of buildings that are not subject to freezing. Dual Check prevents backflow due to low head pressure and conforms to the requirements of ASSE Standard 1052. The stainless steel recessed box conceals the nozzle and operating mechanism. The locking cover prevents unauthorized use.

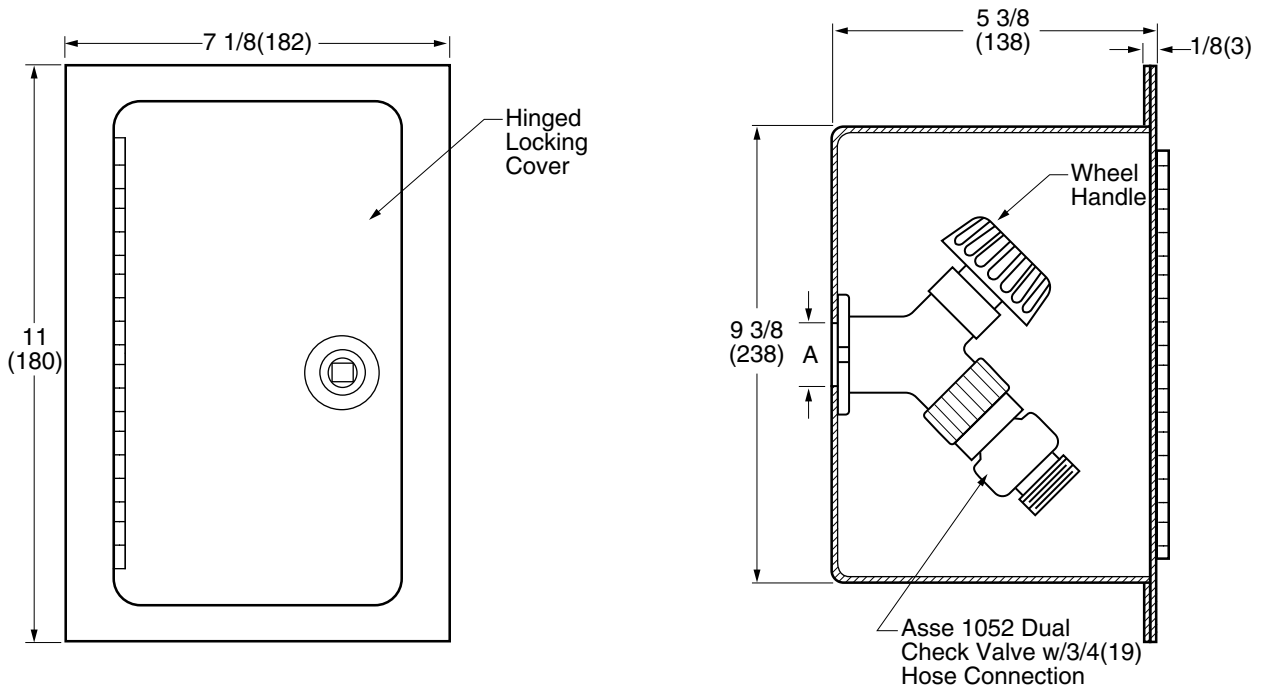

A (Inlet Size) = 1/2(13) or 3/4(19)

- Fig. 5572 (-BFP).....1/2"(13) Female NPT Inlet
- Fig. 5573 (-BFP).....3/4"(19) Female NPT Inlet

NOTES:

1. Recommended wall opening 9 3/4"(250) x 6"(150).
2. The AB1953, California Lead Law, and NSF/ANSI Standard 61-2008 - Drinking Water Components are not applicable to Jay R. Smith hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
3. The Dual Check Valve may discharge water to prevent backflow. Do Not install where spillage may cause water damage.
4. Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Hose Valve has a Rough Finish Brass Body Removable Wheel Handle, "T" Handle Key, NPT Female Threaded Inlet Size Indicated by Figure Number Selected, ASSE 1052 Dual Check Valve with 3/4"(19) Hose Connection and Stainless Steel Box with Full 180° Cover Opening.

REV.	DATE	DESCRIPTION	BY	CKD. BY

WEIGHT POUNDS	VOLUME CUBIC FEET

FIGURE NUMBER
5572 (-BFP)
5573 (-BFP)