




D
 DRAWING NUMBER S5904
 SIZE A
 SCALE: NONE
 DATE: 5-12-04
 APPROVED BY: JM
 CHECKED BY: JM
 DRAWN BY: TBW
 FIGURE NUMBER 5904
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

NON-FREEZE SANITARY POST/YARD HYDRANT

FUNCTION: Used where an above ground water outlet is required in areas which are subject to freezing temperatures and where water is not allowed to drain from the casing into the ground. Freezing is prevented by burying the valve housing below the frost line and draining water from the casing after shut-off into the sealed canister. The hydrant is engineered to be fully self contained and easily serviced in the field.

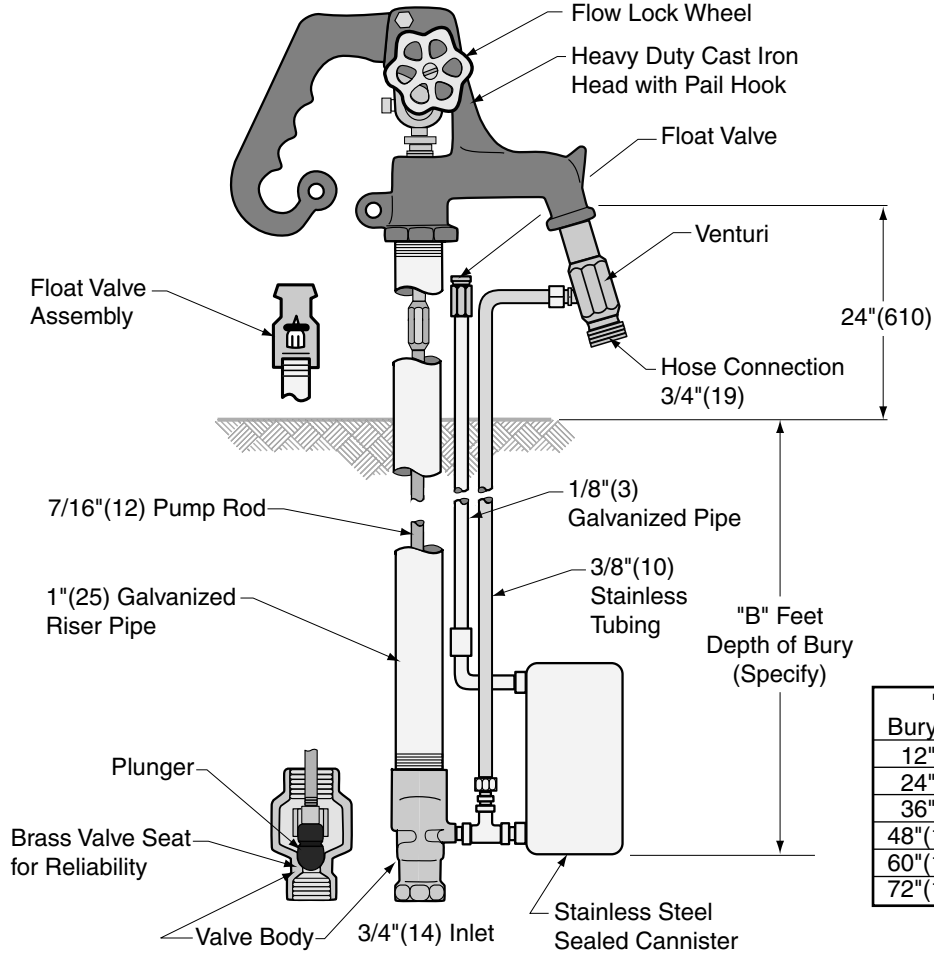

"B" Bury Depth	Overall Length
12"(305)	45"(1143)
24"(610)	57"(1448)
36"(915)	69"(1753)
48"(1219)	81"(2057)
60"(1524)	93"(2362)
72"(1829)	105"(2667)

REGULARLY FURNISHED:

Non-Freeze Post Hydrant with Galvanized Casing Adjustable Flow Wheel Lock Handle, Stainless Steel Underground Cannister and Nozzle with Venturi Adapter.

VARIATIONS:

Vacuum Breaker -H

NOTES:

1. Addition of vacuum breaker will not allow draining of the casing. Smith is not responsible for any casings that burst or related incidents if the hydrant is supplied with a vacuum breaker.
2. The AB1953, California Lead Law, and NSF/ANSI Standard 61-2008 - Drinking Water System Components are not applicable to Jay R. Smith hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
3. Do not leave hose attached in freezing temperatures as it may prevent proper drainage of the shut-off valve/casing.
4. Dimensions shown in parentheses are in millimeters.

(See back of sheet for parts list)

D	6-13-11	Revised Note	TBW	CL	WEIGHT	VOLUME	FIGURE NUMBER
C	5-23-11	Added Note	TBW	CL	POUNDS	CUBIC FEET	5904
B	10/7/09	Revised Notes	RN	CL			
A	06/01/09	Removed 84" & 96" depths	JJ	JM			
REV.	DATE	DESCRIPTION	BY	CKD. BY			



JAY R. SMITH MFG. CO.
 MEMBER OF ACORN'S FAMILY OF COMPANIES
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



LOCATION

DRAWING NUMBER
S5904BS

SIZE
A

SCALE:
NONE

DATE:
5-12-04

APPROVED BY:
JM

CHECKED BY:
JM

DRAWN BY:
TBW

FIGURE NUMBER
5904BS

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA


DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

NON-FREEZE SANITARY POST/YARD HYDRANT

OPERATION: The hydrant incorporates a nozzle-venturi adaptor (located above ground for serviceability), and a stainless steel underground cannister. When the hydrant is turned off, the plunger seals against the valve seat and stops the flow. The remaining water in the casing (riser) drains back into the cannister which is buried below the frost level. When the hydrant is activated, flow through the nozzle creates a vacuum which empties the cannister through the venturi adaptor at the nozzle. Since the hydrant drains into a sealed cannister and not into the ground through a drainage outlet, the water never comes in contact with the soil. This avoids possible contamination of the water supply.

SPECIAL INSTRUCTIONS: The brass packing nut located on the head of the sanitary post/yard hydrant has been factory adjusted. If leakage should occur upon installation or after usage, it may be necessary to slightly tighten the brass packing nut.

"CAUTION": Do not overtighten the brass packing nut. Damage will occur to the inner O-rings. Do not leave hose attached in freezing temperatures as it may prevent proper drainage of the shut-off valve. To prevent unauthorized use, the handle can be locked by inserting padlock into holes provided in handle and head.

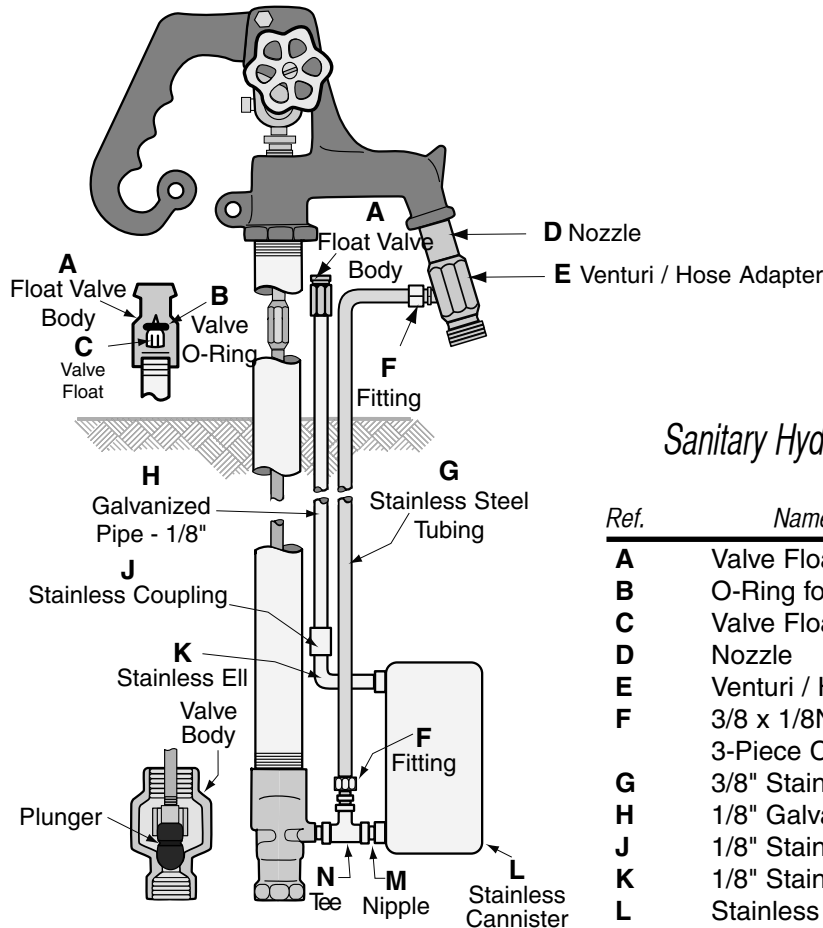

Sanitary Hydrant Parts

Ref.	Name of Part
A	Valve Float Body
B	O-Ring for Valve
C	Valve Float
D	Nozzle
E	Venturi / Hose Adapter
F	3/8 x 1/8NPT 3-Piece Compression Fitting
G	3/8" Stainless Steel Tubing
H	1/8" Galvanized Pipe
J	1/8" Stainless Steel Coupling
K	1/8" Stainless Steel Ell
L	Stainless Steel Cannister
M	1/8" Stainless Steel Nipple
N	1/8" Stainless Steel Tee

REV.	DATE	DESCRIPTION	BY	CKD. BY

WEIGHT POUNDS	VOLUME CUBIC FEET
------------------	----------------------

FIGURE NUMBER
5904BS