

K



JAY R. SMITH MFG. CO.®
 MEMBER OF ACORN'S FAMILY OF COMPANIES
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



MEMBER OF:


LOCATION

FLOOR DRAINS STAINLESS STEEL - CARBON STEEL

ADJUSTABLE STRAINER HEAD

FUNCTION: General service floor drain for use in finished areas where a corrosion resistant drain is required.

Free Area
12.50 SQ IN
(81) SQ CM

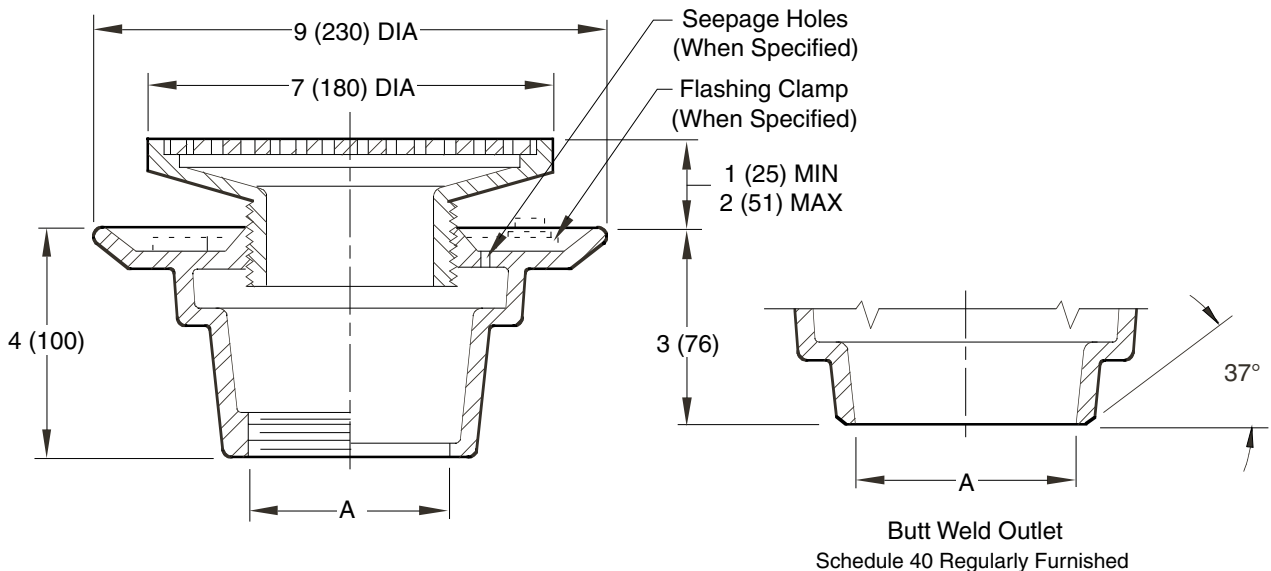

A (Pipe Size) = 02(50), 03(75) or 04(100)

Fig. 9700C . . . CAULK OUTLET
 Fig. 9700T . . . THREADED OUTLET

Design Pressures and Temperatures

1. With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
2. When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

REGULARLY FURNISHED:

CF8 (Equivalent to Type 304) Rough Finish Stainless Steel Body and Round Adjustable Strainer Head with Satin Finished Top.

VARIATIONS:

- Flashing Clamp with Seepage Holes -C
- Seepage Holes -WSH
- Solid Cover -SC
- Vandal Proof Grate -U
- 4(100) or 6"(150) Dia. Funnel (Specify Fig. 9703)
- 8 3/4(220) x 3 3/4"(95) Funnel (Specify Fig. 9704)
- 90° Outlet (Specify Fig. 9759)
- BW Butt Weld Outlet (Specify Schedule -S05, -S10 or -S40)

OPTIONAL MATERIALS:

- A-27 Carbon Steel -A27
- CF8M (Equivalent To Type 316) Stainless Steel -316
- Nickel Bronze Strainer -NB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER
S9700SIZE
ASCALE:
NONEDATE:
11-12-84APPROVED BY:
TDCHECKED BY:
VGDDRAWN BY:
PJ

9700

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

K	10-17-11	Added Note	TBW	CL
J	9-19-11	Revised Function, Text	TBW	CL
H	4-28-06	Revised Variations	RN	CL
G	11-2-05	Removed Note	TBW	CL

TBW	CL
TBW	CL
RN	CL
TBW	CL

WEIGHT POUNDS

VOLUME CUBIC FEET

FIGURE NUMBER

9700

REV.	DATE	DESCRIPTION	BY	CKD. BY
------	------	-------------	----	---------