



# JAY R. SMITH CO.

PLUMBING & DRAINAGE PRODUCTS

959 Alness Street, North York, Ontario M3J 2J1  
 TEL: (416) 736-9610 FAX: (416) 736-3789

LOCATION

DRAWING NUMBER  
S1330-CAN

SIZE  
A

SCALE:  
NONE

DATE:  
5-24-85

APPROVED BY:  
TD

CHECKED BY:  
TD

DRAWN BY:  
TD

1330, 1340-CAN

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

## GENERAL PURPOSE ROOF DRAINS

### 8 1/2" (215) DIAMETER - LOW PROFILE DOME

**FUNCTION:** Used in flat roofs, gutters or valleys of any construction. Small diameter pan is particularly adaptable to gutters and valleys where limited space is available. Flashing clamp holds flashing and roofing materials without puncturing. Low profile dome provides sufficient free area for quick drainage of rain water and protects the drain sump and connected piping from the intrusion of debris.

Free Area  
41.5 SQ IN  
(268) SQ CM

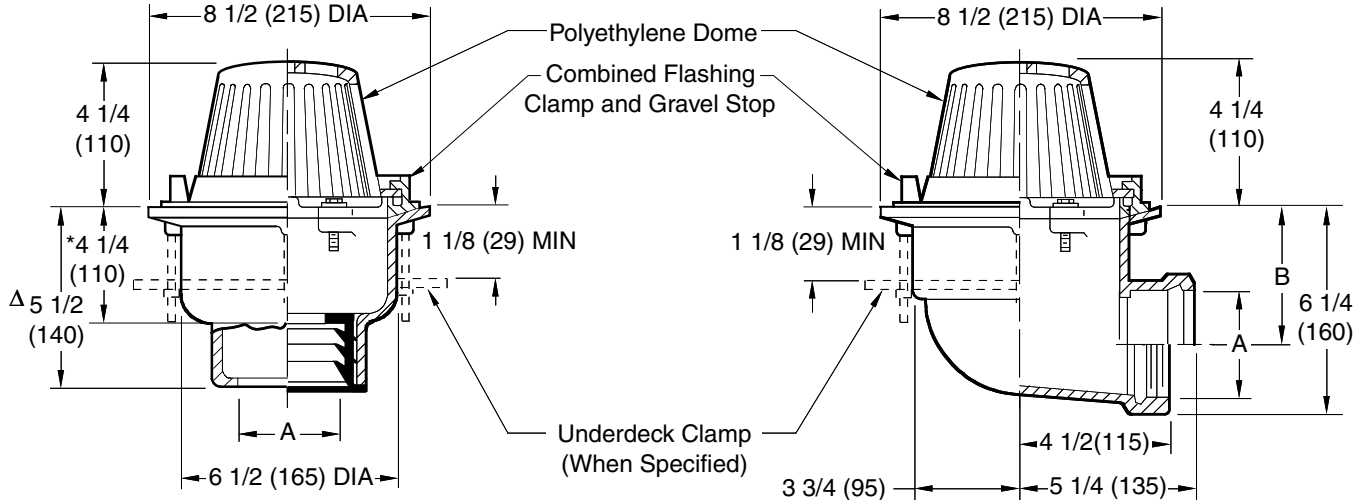


Fig. 1330C ..... CAULK OUTLET  
 Fig. 1330Y ..... NO-HUB OUTLET

\*This Dimension to Internal

Fig. 1340C ..... CAULK OUTLET  
 Fig. 1340T ..... THREADED OUTLET

A (Pipe Size) = 02(50), 03(75) or 04(100)

recommended deck opening

with suffix -R	9(230) DIA
less suffix -R	7 3/4(195) DIA

Stop of Speedi-Set Gasket.  
 Δ Same for Caulk, NO-HUB and Speedi-Set, 4 1/4(110) for Threaded.

A SIZE	02 (50)	03 (75)	04 (100)
B	4 1/2 (115)	4 (100)	3 1/2 (89)

#### REGULARLY FURNISHED:

Duco Cast Iron Body with Combined Flashing Clamp and Gravel Stop with Polyethylene Dome.

#### VARIATIONS:

- Expansion Joint (Specify Fig. 1710) (Fig. 1330 only)
- Extension -E (Specify Height)
- 2"(51) High Water Dam -WD
- "L" Shaped Underdeck Clamp -CL
- L Speedi-Set Service Weight (Fig. 1330 only)
- LXH Speedi-Set Extra Heavy (Fig. 1330 only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 1340 only)
- Secondary Flashing Clamp -C2
- Sump Receiver -R
- Underdeck Clamp -C
- Vandal Proof Dome -U
- T Threaded Outlet

#### OPTIONAL MATERIALS:

- Aluminum Dome -AD
- Cast Iron Dome -CID
- Galvanized Cast Iron Body & Collar -G
- Galvanized Cast Iron Dome -CIDG
- Rough Bronze Dome -RBD

**NOTE:** Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY
	11-1-02 5-26-99 4-7-97	Rev. "V" Notch Rev. Opt. Mat. Added Millimeters	RN CMD EMB	BS BS

WEIGHT  
POUNDS

VOLUME  
CUBIC FEET

FIGURE NUMBER

1330, 1340-CAN