

E



JAY R. SMITH MFG. CO.
 DIVISION OF SMITH INDUSTRIES, INC.
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



MEMBER OF:



LOCATION

CAULK FERRULE CLEANOUTS WITH FRAME AND COVER

LEAD SEAL PLUG WITH FRAME AND SCORIATED COVER

FUNCTION: Used in hub openings where a floor or wall cover is required. Ribbing on outside of ferrule prevents turning of ferrule in the caulking lead.

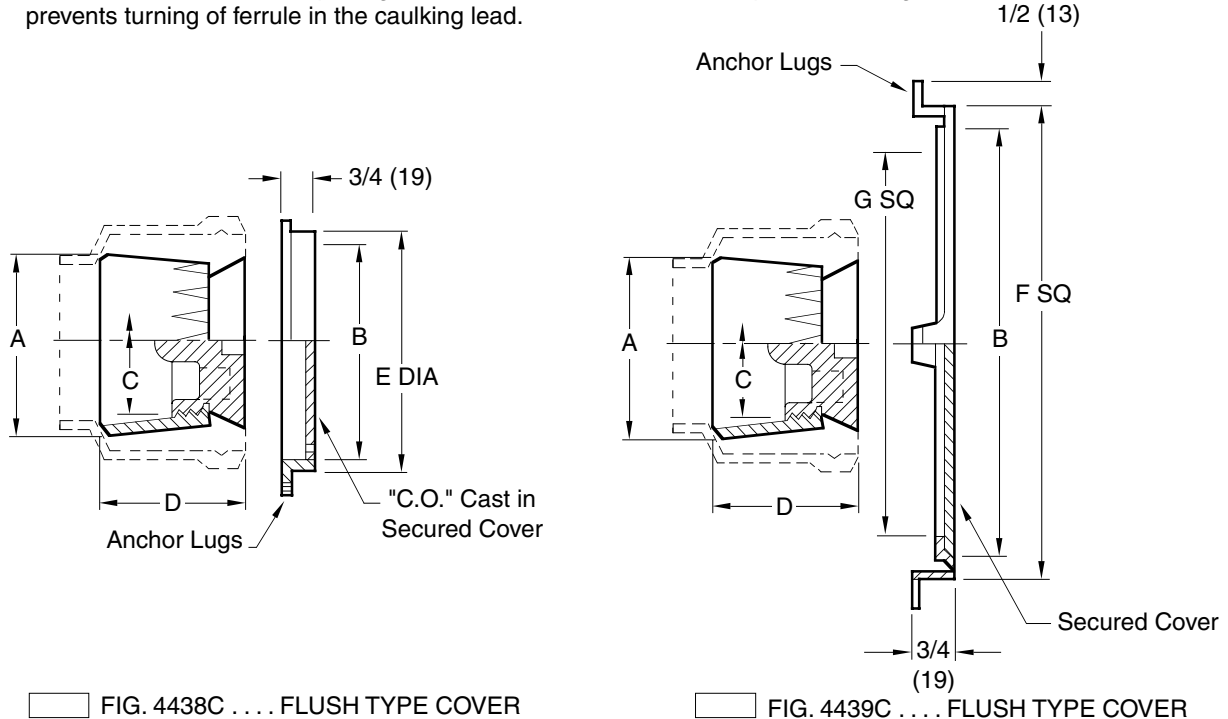


FIG. 4438C FLUSH TYPE COVER

FIG. 4439C FLUSH TYPE COVER

A SIZE	B OPENING		C SIZE	D	E DIA	F SQ	G SQ
	DIA	SQ					
02 (50)	4 (100)	6 x 6 (150) x (150)	1 1/2 (38)	2 1/2 (64)	4 1/2 (115)	7 (180)	5 1/2 (140)
03 (80)	5 1/2 (140)	6 x 6 (150) x (150)	2 1/2 (64)	2 3/4 (70)	5 3/4 (145)	7 (180)	5 1/2 (140)
04 (100)	6 (150)	6 x 6 (150) x (150)	3 1/2 (89)	3 (76)	6 1/2 (165)	7 (180)	5 1/2 (140)
05 (125)	6 (150)	8 x 8 (205) x (205)	4 1/2 (115)	3 (76)	6 1/2 (165)	9 (230)	7 1/2 (190)
06 (150)	8 (205)	8 x 8 (205) x (205)	5 1/2 (140)	3 (76)	8 1/2 (215)	9 (230)	7 1/2 (190)
08 (200)	10* (255)	10 x 10 (255) x (255)	7 1/2 (190)	3 1/2 (89)	10 1/2 (265)	11 (280)	9 1/2 (240)

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Caulk Ferrule with Cast Iron Lead Seal Plug and Secured Scoriated Nickel Bronze Cover and Frame with Anchor Lugs. Type of Cover as Indicated by Figure Number Selected.

VARIATIONS:

- Cover Drilled in Center and Furnished with 1/4"(6)-20 x 2 1/2"(64) Long Screw
- "T" Handle Plug -TP Plug Tapped 1/4"(6) -20 Thread
- Vandal Proof Screws-U

OPTIONAL MATERIALS:

- Cast Bronze Body -BB
- Cast Bronze Plug -BP
- Polished Bronze Frame and Cover -PB

DRAWING NUMBER
S4438SIZE
ASCALE:
NONEDATE:
4-11-83APPROVED BY:
SJMCHECKED BY:
SJMDRAWN BY:
CR

4438, 4439

FIGURE
NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
E	8-11-97	Chg'd Opt Mat	EMB	BS			4438, 4439
D	1-11-96	Added Millimeters	EMB	BS			
C	7-27-94	Revised	EMB	BS			
B	8-6-93	Submittal Update	TWK	BS			