

CAULK FERRULE CLEANOUTS WITH FRAME AND COVER

TAPER THREAD PLUG WITH FRAME AND SCORIATED COVER

FUNCTION: Used in hub openings where a floor or wall cover is required. Face-of-Wall or Flush-with-Wall Cover available with finished wall.

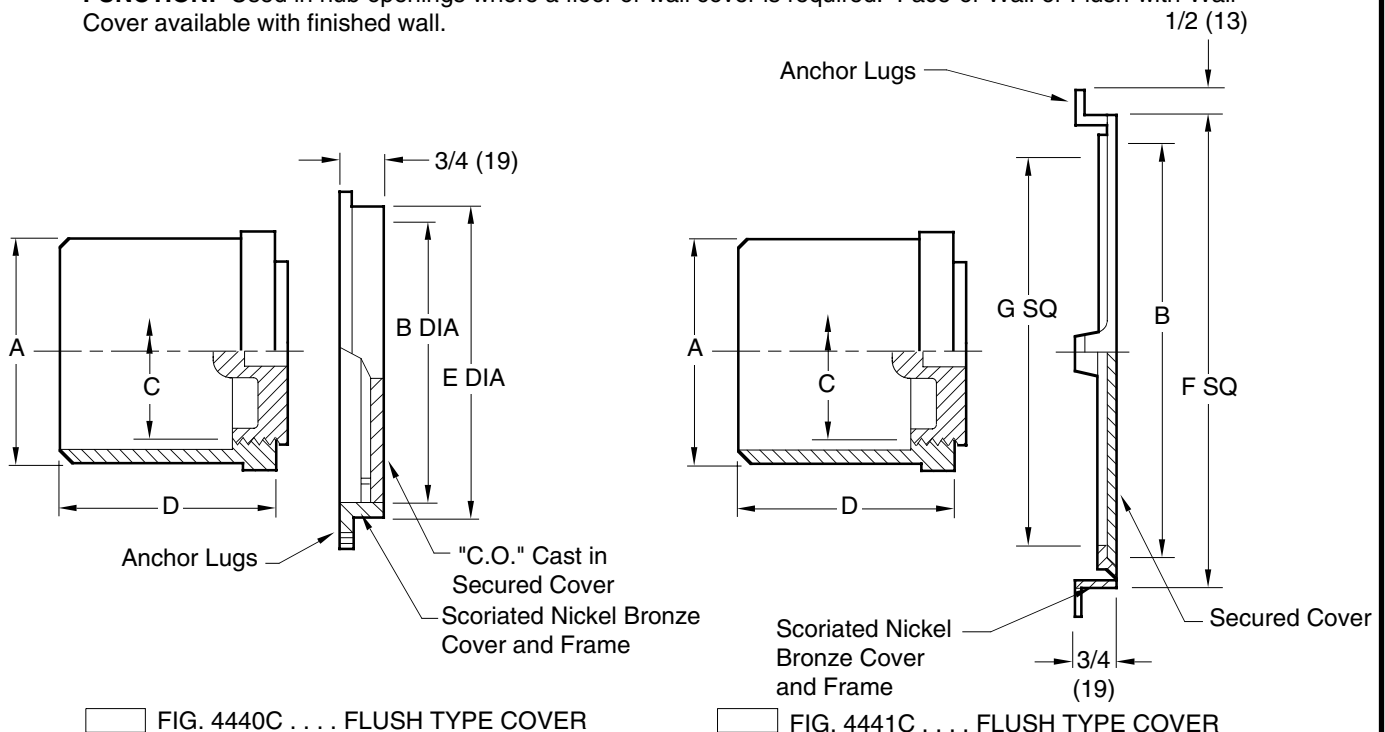


FIG. 4440C FLUSH TYPE COVER

FIG. 4441C FLUSH TYPE COVER

A SIZE	B OPENING		C SIZE	D	E DIA	F SQ	G SQ
	DIA	SQ					
▲ 02 (50)	4 (100)	6 x 6 (150) x (150)	1 1/2 (38)	3 1/2 (89)	4 1/2 (115)	7 (180)	5 1/2 (140)
▲ 03 (80)	5 1/2 (140)	6 x 6 (150) x (150)	2 1/2 (64)	3 3/4 (95)	5 3/4 (145)	7 (180)	5 1/2 (140)
▲ 04 (100)	6 (150)	6 x 6 (150) x (150)	3 1/2 (89)	4 1/4 (110)	6 1/2 (165)	7 (180)	5 1/2 (140)
05 (125)	6 (150)	8 x 8 (205) x (205)	4 1/2 (115)	4 1/4 (110)	6 1/2 (165)	9 (230)	7 1/2 (190)
06 (150)	8 (205)	8 x 8 (205) x (205)	5 1/2 (140)	4 1/4 (110)	8 1/2 (215)	9 (230)	7 1/2 (190)
08 (200)	10* (255)	10 x 10 (255) x (255)	7 1/2 (190)	4 1/2 (115)	10 1/2 (265)	11 (280)	9 1/2 (240)

▲ Sized for Service Weight and/or NO-HUB

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Caulk Ferrule with Cast Bronze Taper Thread Plug and Secured Scoriated Nickel Bronze Cover and Frame with Anchor Lugs. Type of Cover as Indicated by Figure Number Selected.

VARIATIONS:

- Cover Drilled in Center and Furnished with 1/4"(6)-20 x 2 1/2"(64) Long Screw
- Smooth Cover -SC
- "T" Handle Plug -TP
Plug Tapped 1/4"(6) -20 Thread
- Vandal Proof Screws -U

OPTIONAL MATERIALS:

- Cast Bronze Body -BB
- Polished Bronze Frame and Cover -PB

DRAWING NUMBER
S4440

SIZE
A

SCALE:
NONE

DATE:
12-15-82

APPROVED BY:
SJM

CHECKED BY:
JD

DRAWN BY:
JD

4440, 4441

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
F E	10-20-98 8-11-97	Revised S.W. and/or N.H Chg'd Opt Mat	TBW EMB	JCS BS			4440, 4441