

H

**SMITH® JAY R. SMITH MFG. CO.®**  
 DIVISION OF SMITH INDUSTRIES, INC.  
 POST OFFICE BOX 3237  
 MONTGOMERY, ALABAMA 36109-0237 (USA)  
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



LOCATION

DRAWING NUMBER  
S4810

SIZE  
A

SCALE:  
NONE

DATE:  
2-11-83

APPROVED BY:  
JM

CHECKED BY:  
BH

DRAWN BY:  
RK

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

# FLOOR ACCESS COVERS

## ROUND FRAME WITH SCORIATED COVER

**FUNCTION:** Used in concrete floors and/or surfaced areas. Scoriated covers are used where floors are subject to ordinary foot traffic and normal loadings. The secured cover should be used wherever vandalism can be a problem.

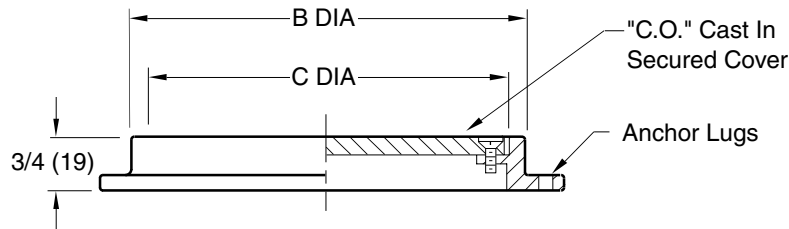


Fig. 4810 . . . . SECURED COVER  
eg: 4810 (-04)\*

SPECIFY FIG.	PLUG SIZE	B DIA	C DIA
4810 (-04)	2 (51)	4 1/2 (115)	4 (100)
4810 (-05)	3 (76)	5 3/4 (145)	5 1/2 (140)
4810 (-06)	4 (100)	6 1/2 (165)	6 (150)
4810 (-06)	5 (125)	6 1/2 (165)	6 (150)
4810 (-08)	6 (150)	8 1/2 (215)	8 (205)
4810 (-10)	8 (205)	10 1/2 (265)	10 (255)

**NOTE:** Dimensions shown in parentheses are in millimeters.  
\*Reflect's C DIA

**REGULARLY FURNISHED:**

Secured Scoriated Nickel Bronze Cover and Frame with Anchor Lugs.

**VARIATIONS:**

- Cover drilled in Center and furnished with 1/4" (6) - 20 x 2 1/2" (64) long screw
- Smooth Top -S T
- Vandal Proof Screws -U

**OPTIONAL MATERIALS:**

- Polished Bronze -PB

**4810**

REV.	DATE	DESCRIPTION	BY	CKD. BY
H	6-14-99	Chg'd Table	CMD	BS
G	2-2-99	Chg'd Table	CMD	BS
F	1-23-96	Chg'd Table	EMB	BS
E	9-5-95	Added Millimeters & Chg'd Table	EMB	BS
D	7-27-94	Revised	EMB	BS
C	8-16-93	Submittal Update	TWK	BS

WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER <b>4810</b>
---------------	-------------------	------------------------------