


WATER SAVER TRAP PRIMER

Note: Eliminates the need for a mechanical trap primer located behind wall installed in a potable water line.

Note: Dimensions shown in parentheses are in millimeters.

- ① Escutcheon
- ② 1/2"(13) Compression Fitting
- ③ 1 1/2"(38) Cast Brass P-trap
- ④ 1/2"(13) 90° Compression Fitting
- ⑤ 1"(25) Cleanout Plug
- ⑥ 1 1/2"(38) 17 Gauge Wall Tube
- ⑦ Flexible Primer Tube
- ⑧ 1 1/4"(32) and 1 1/2"(38) Slip Joints
(Nuts are provided to accommodate the appropriate fixture tailpiece. P-trap and wall tube are 1 1/2"(38) in size.)

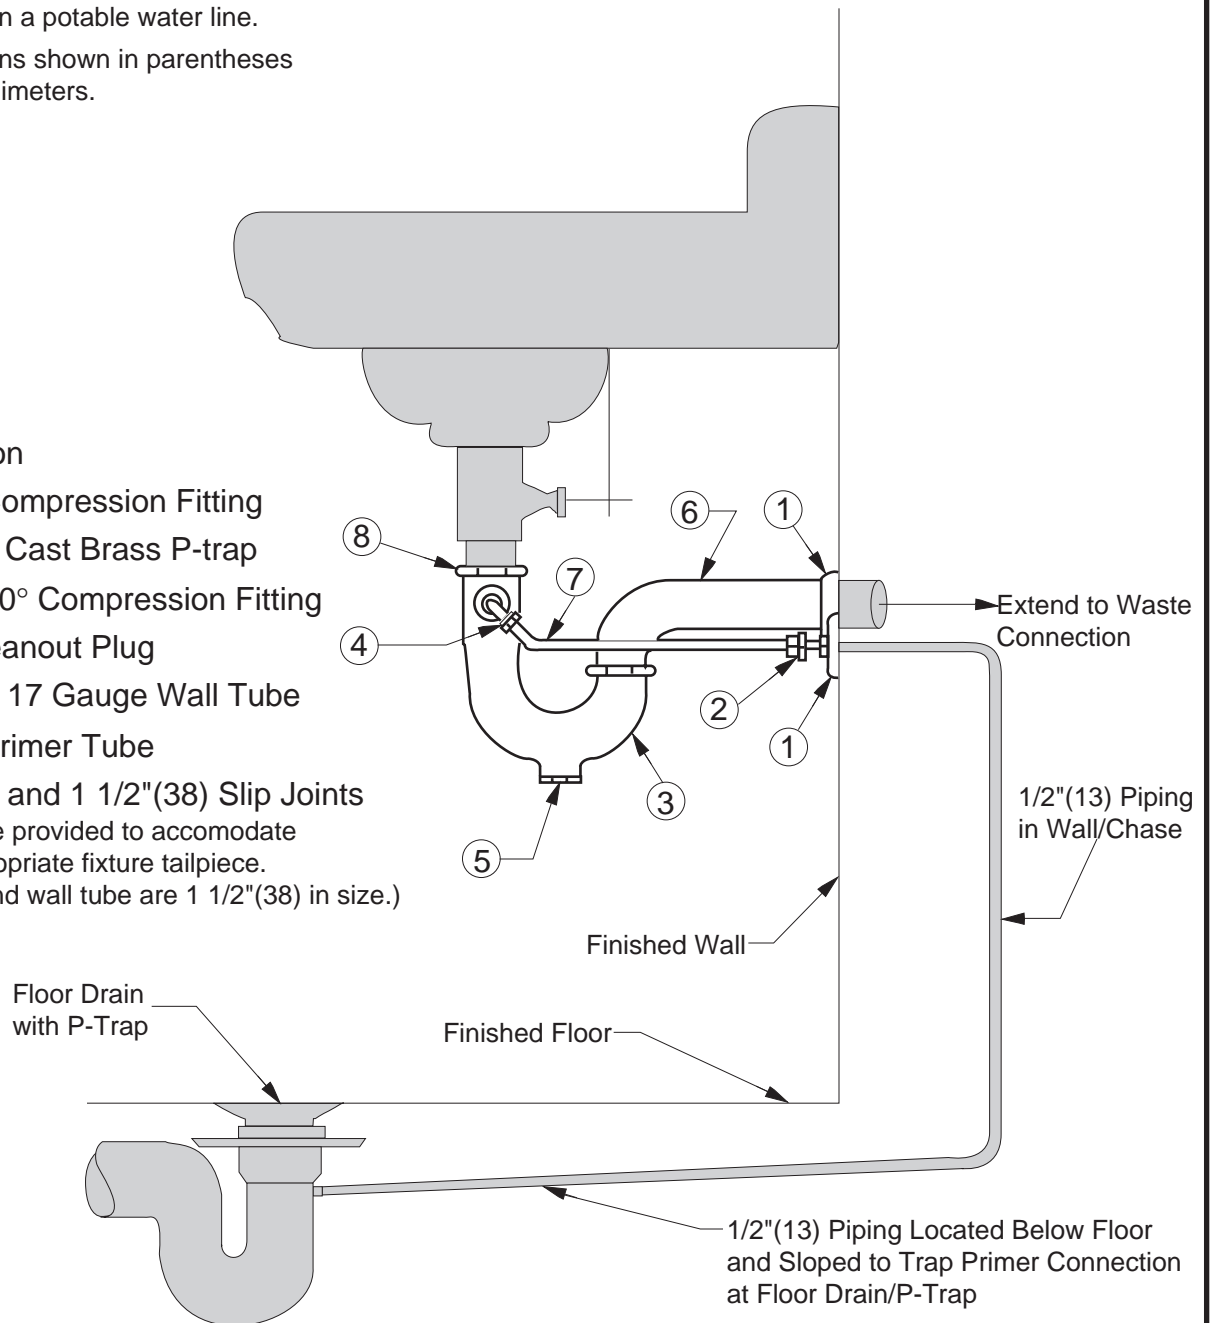

Specification:

Trap Primer (Non-Mechanical Type):

At designated fixtures, supply a water saver trap primer unit, complete with satin chrome plated cast bronze P-trap with cleanout, 17 gauge tubing outlet, slip joint nuts, washers, escutcheons and a 1/2"(13) flexible primer tube with compression fitting. Unit shall be Jay R. Smith "Prime-Eze" No. 2698 and shall be certified by the American Society of Sanitary Engineering (ASSE) to be in compliance with ASSE Standard 1044.

