

H



JAY R. SMITH MFG. CO.
 DIVISION OF SMITH INDUSTRIES, INC.
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com




LOCATION

FLOOR DRAIN

LIGHT DUTY DRAINS - HINGED GRATE

FUNCTION: Used in light traffic in on grade areas where the hinged grate eliminates loss of grate

Free Area
 16 SQ IN
 (103) SQ CM

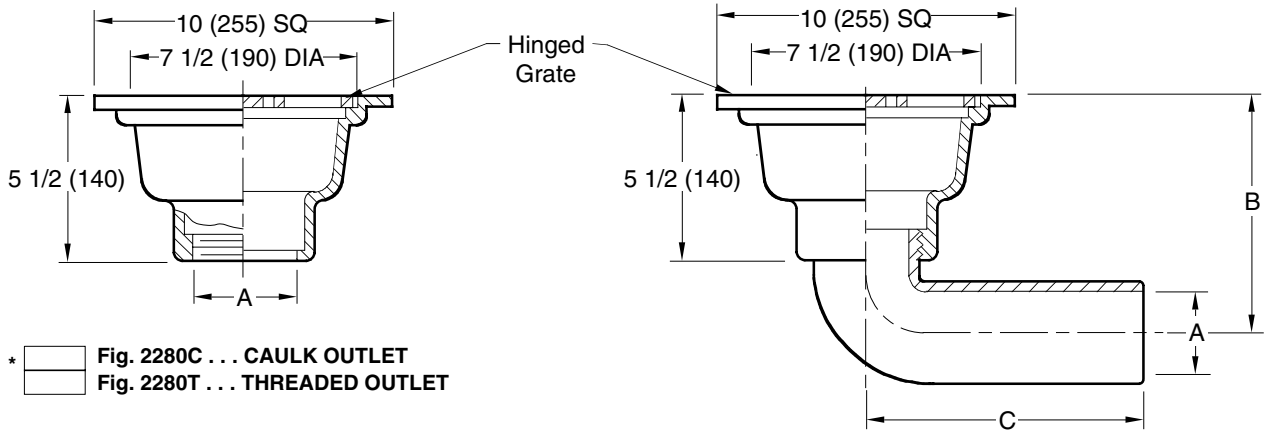

* Fig. 2280C . . . CAULK OUTLET
 Fig. 2280T . . . THREADED OUTLET

A (Pipe Size) = 02(50), 03(80) or 04(100)

Fig. 2285S. . . SPIGOT OUTLET
 SIZED FOR NO-HUB AND/OR SERVICE WEIGHT

NOTE: Dimensions shown in parentheses are in millimeters.

*Meets U.S. Gov't Spec.
 WW-P-541-b, Type 220, 02(50)
 and 03"(80) sizes only. See Fig.
 2130 for 04"(100) size.

■ Meets ANSI Spec A112.21.1M
 02(50), 03(80) or 04"(100) sizes only.

A SIZE	B	C
02 (50)	8 (205)	7 (180)
03 (80)	8 1/4 (210)	7 (180)
04 (100)	8 1/2 (215)	7 (180)

REGULARLY FURNISHED:

Duco Cast Iron Body and Slotted Hinged Grate.

VARIATIONS:

- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2280 only)
- Sediment Bucket -B
- Vandal Proof Top -U
- T Threaded Outlet (Fig. 2280 only)

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G

2280, 2285

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

DRAWING NUMBER S2280

SIZE A

SCALE: NONE

DATE: 5-17-85

APPROVED BY: TD

CHECKED BY: TD

DRAWN BY: PJ

H	4-9-97	Added Millimeters	EMB	BS
G	7-1-94	Revised	CMB	BS
F	9-29-93	Submittal Update	EMB	BS
E	3-15-93	Chg. Function, Fig. #'s	TWK	BS

REV.	DATE	DESCRIPTION	BY	CKD. BY
------	------	-------------	----	---------

WEIGHT POUNDS
 VOLUME CUBIC FEET

FIGURE NUMBER

2280, 2285