

# FLOOR DRAINS

## MEDIUM DUTY DRAINS WITH 8 1/2" ROUND ADJUSTABLE TOPS

**FUNCTION:** Used in moderate traffic areas in any type of floor construction. Adjustable top collar permits accurate positioning of grate to meet finished floor level.

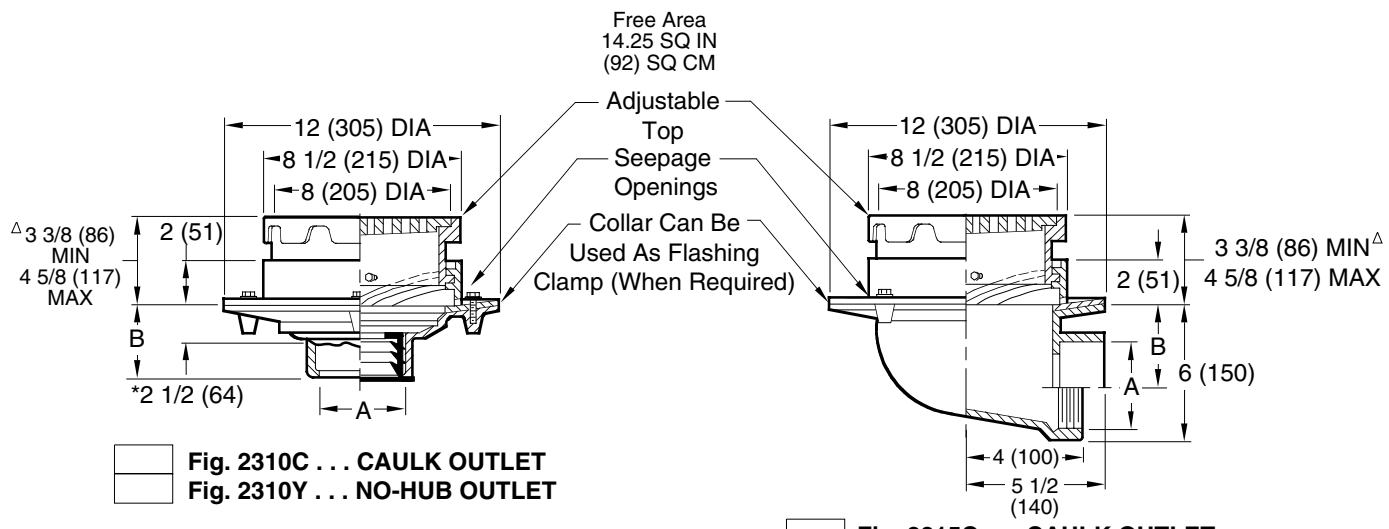


Fig. 2310C ... CAULK OUTLET  
 Fig. 2310Y ... NO-HUB OUTLET

Fig. 2315C ... CAULK OUTLET  
 Fig. 2315T ... THREADED OUTLET

A SIZE	02 (50)	03 (80)	04 (100)	06 (150)
B	3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set, 2 (51) for Threaded			3 3/4 (95) NO-HUB Only

A SIZE	02 (50)	03 (80)	04 (100)
B	4 1/4 (110)	3 3/4 (95)	3 1/4 (83)

\*This Dimension to Internal Stop of Speedi-Set Gasket.  
<sup>Δ</sup>add 3/16" (5) when bronze top is specified

**REGULARLY FURNISHED:**

Duco Cast Iron Body and Flashing Collar with Adjustable Top and Bar Grate.

**NOTE:** Dimensions shown in parentheses are in millimeters.

\*Not available on Fig. 2310T threaded outlet drain.

**VARIATIONS:**

- Closure Plug -XP (Fig. 2310 only)
- Dome Grate -D
- Extensions (Specify Height) -E
- Flat Bottom Strainer -FBS (Fig. 2310 only)
- Hinged Grate -H
- L Speedi-Set Service Weight (Fig. 2310 only)
- LXH Speedi-Set Extra Heavy (Fig. 2310 only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2315 only)
- Square Top -S
- \*  Trap Primer Connection -P050 1/2"(13) & -P075 (3/4"(19)
- Vandal Proof Grate -U
- T Threaded Outlet

**OPTIONAL MATERIALS:**

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB
- Stainless Steel (Specify Fig. 9725)

DRAWING NUMBER S2310  
 SIZE A  
 SCALE: NONE  
 DATE: 5-17-85  
 APPROVED BY: TD  
 CHECKED BY: TD  
 DRAWN BY: PJ  
**2310, 2315**  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
	11/17/05 12-11-97	Revised 2310 A-Size Table Revised Var & added note	JJ EMB	CL DG			<b>2310, 2315</b>