



JAY R. SMITH MFG. CO.
 DIVISION OF SMITH INDUSTRIES, INC.
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



MEMBER OF:

LOCATION

FLOOR DRAINS

WITH ADJUSTABLE TOPS AND SEDIMENT BUCKETS

MEDIUM DUTY DRAINS WITH

12" (305) ROUND TOP - "SAFE-SET" BUCKET

FUNCTION: Used in moderate traffic areas and in any type of floor construction where accurate position of grate is necessary to meet the finished floor level and where the waste water contains solids and debris that must be intercepted. Large top will accept higher flow rates. "Safe-Set" design insures bucket replacement after cleaning since top grate cannot be inserted unless bucket is in place.

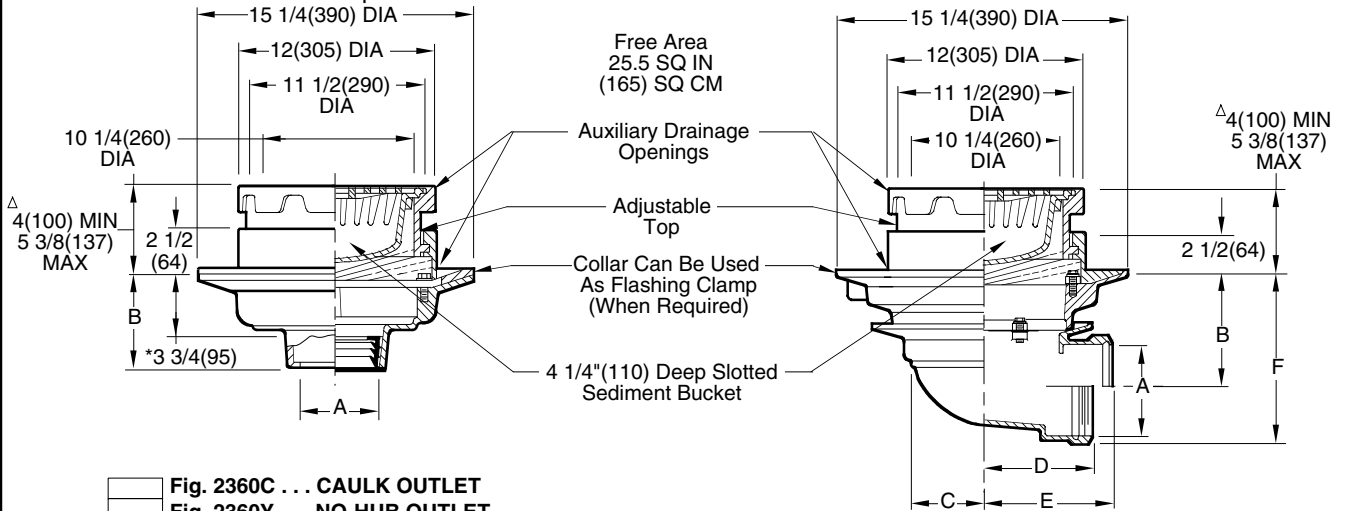


Fig. 2360C ... CAULK OUTLET
 Fig. 2360Y ... NO-HUB OUTLET

Fig. 2365C ... CAULK OUTLET
 Fig. 2365T ... THREADED OUTLET

A SIZE	02(50)	03(80)	04(100)	05(125)	06(150)
B	5(125) for Caulk, NO-HUB and Speedi-Set 3 3/4(95) for Threaded				

NOTE: 02(50), 03(80), & 04"(100) sizes require a transition collar (as shown in above illustration) which fits between the body & collar. 05(125) & 06"(150) sizes do not require transition collar.

A SIZE	02 (50)	03 (80)	04 (100)	05 (125)	06 (150)
B	6 7/8 (175)	6 3/8 (162)	5 7/8 (149)	5 (125)	4 1/2 (115)
C	4 3/4 (120)	4 3/4 (120)	4 3/4 (120)	6 1/4 (160)	6 1/4 (160)
D	6 (150)	6 (150)	6 (150)	6 5/8 (168)	6 7/8 (175)
E	7 1/4 (185)	7 1/2 (190)	7 3/4 (195)	7 3/4 (195)	7 3/4 (195)
F	8 5/8 (216)	8 3/4 (220)	8 3/4 (220)	8 1/2 (215)	8 1/2 (215)

*This Dimension to Internal Stop of Speedi-Set Gasket

Δ add 5/16"(8) when bronze top is specified.
 Δ add 7/8"(22) when hinged top is specified.
 • Hinged grate not available in safe-set design with suspended bucket. Full grate is provided with a free standing bucket

REGULARLY FURNISHED:

Duct Cast Iron Body and Flashing Collar with Adjustable Top and Bar Grate with Sediment Bucket.

VARIATIONS:

- Adjustable Extension 4 1/2(115) to 6"(150) -E
- Flat Bottom Strainer -FBS
- Hinged Grate -H
- L Speedi-Set Service Weight 02(50), 03(80) & 04"(100) sizes only (Fig. 2360 only)
- LXH Speedi-Set Extra Heavy 02(50), 03(80) & 04"(100) sizes only (Fig. 2360 only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2365 only)
- Square Top -S
- Vandal Proof Grate -U
- T Threaded Outlet

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S2360

SIZE A

SCALE: NONE

DATE: 5-17-85

APPROVED BY: TD

CHECKED BY: TD

DRAWN BY: PJ

2360, 2365

FIGURE NUMBER

E	2-1-96	Added Millimeters	EMB	BS
D	7-1-94	Revised	CMB	BS
C	12-13-93	Chg'd Bucket Depth	EMB	BS
B	10-4-93	Submittal Update	EMB	BS
REV.	DATE	DESCRIPTION	BY	CKD. BY

WEIGHT POUNDS	VOLUME CUBIC FEET
---------------	-------------------

FIGURE NUMBER
2360, 2365

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE