

E



JAY R. SMITH MFG. CO.
 DIVISION OF SMITH INDUSTRIES, INC.
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



MEMBER OF:




LOCATION

FLOOR DRAINS

BLOOD AND WATER DRAINS

FUNCTION: Used in packing house slaughtering areas. Consists of two individual drains. Slotted grate drain permits drainage of animal blood to separate storage tank while adjacent drain connected to sewer is covered by solid ground joint plug. When area is to be washed down, the solid plug is put on the blood drain and the slotted grate on the sewer water drain, thus water used in the cleaning operation will be directed to sewer and will not enter the blood storage tank.

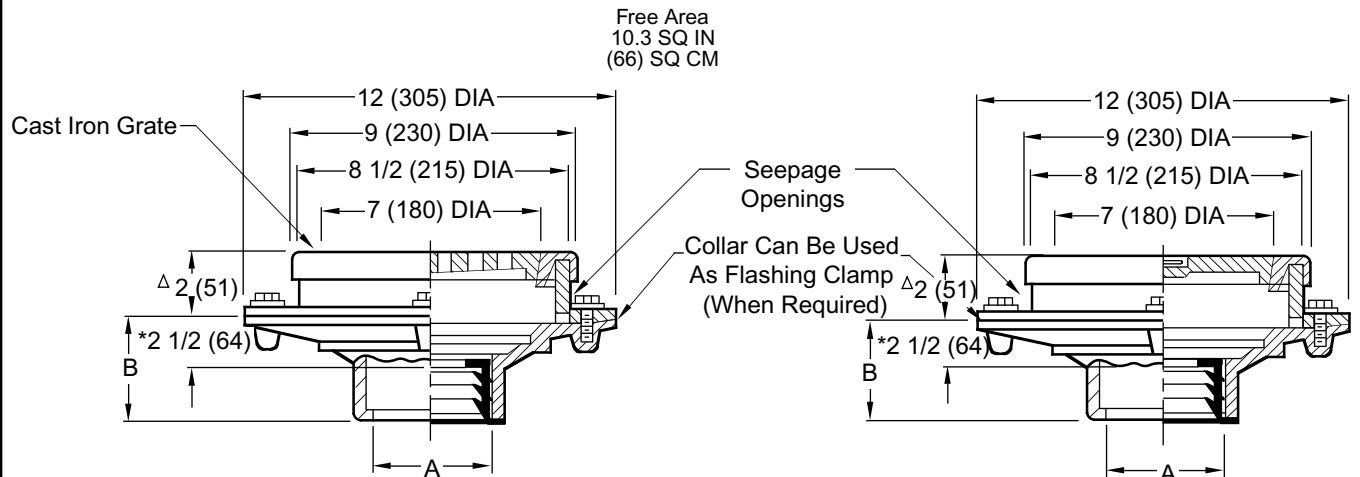

A SIZE	02(50)	03(80)	04(100)
B	3 3/4 (95) for Caulk, NO-HUB and Speedi-Set 2 (51) for Threaded		

Fig. 2640C ... CAULK OUTLET
 Fig. 2640Y ... NO-HUB OUTLET

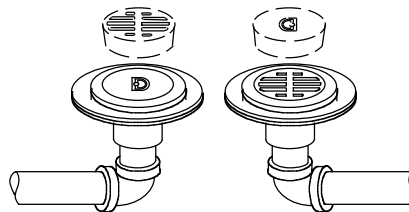


Fig. 2640

TYPICAL INSTALLATION

Drains are located close to each other for ease of switching grate and plug.

*This dimension to Internal Stop of Speedi-Set Gasket.

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Two (2) Duco Cast Iron Bodies with Flashing Collar and Bronze Rim, Cast Iron Grate and Ground Joint Plug.

VARIATIONS:

L Speedi-Set Service Weight
 LXH Speedi-Set Extra Heavy
 T Threaded Outlet

OPTIONAL MATERIALS:

Bronze Grate and Plug -RB
 Galvanized Cast Iron -G

DRAWING NUMBER
S2640SIZE
ASCALE:
NONEDATE:
5-17-85APPROVED BY:
TDCHECKED BY:
TDDRAWN BY:
PJ

2640

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

E	9-16-96	Remove Heavy Duty Tractor	EMB	BS
D	6-16-95	Added Millimeters	EMB	BS
C	7-4-94	Revised	CMB	BS
B	12-2-93	Chg'd Table, Var.	TWK	BS

BY	CKD. BY
----	---------

WEIGHT
POUNDSVOLUME
CUBIC FEET

FIGURE NUMBER

2640

REV.	DATE	DESCRIPTION	BY	CKD. BY
------	------	-------------	----	---------