

B

SMITH® JAY R. SMITH MFG. CO.®
 DIVISION OF SMITH INDUSTRIES, INC.
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



MEMBER OF:

LOCATION

PLANTING AREA DRAIN

FOR LARGE AREAS

FUNCTION: The perforated standpipe, when surrounded by gravel fill, provides drainage of excess water from the planting or flower box. Top of standpipe is set at ground level and protected by dome cap. Excess surface water overflows into top of standpipe.

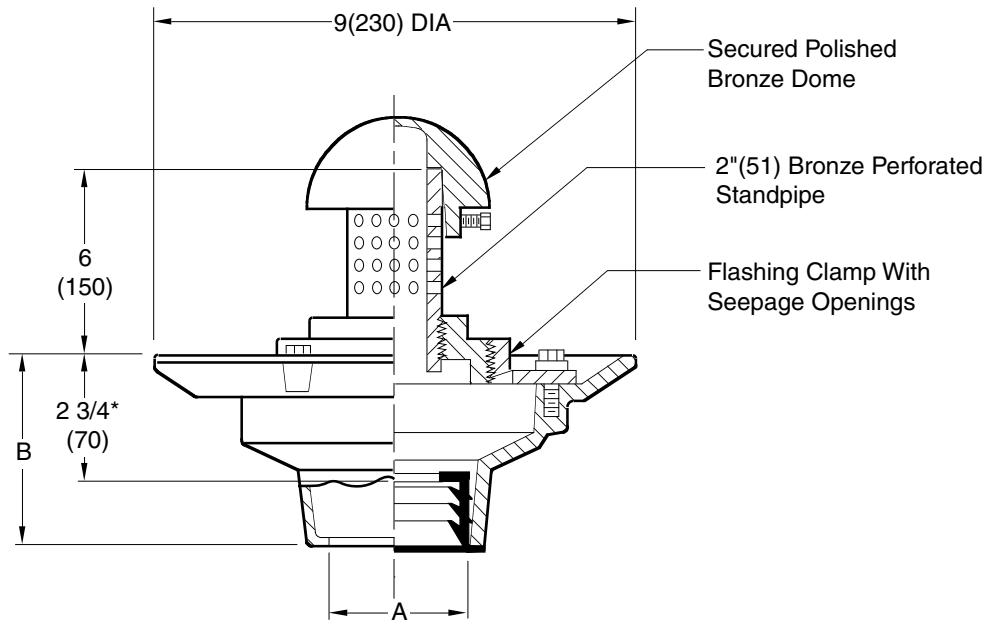


Fig. 2680C ... CAULK OUTLET
 Fig. 2680Y ... NO-HUB OUTLET

*This dimension to Internal Stop of Speedi-Set Gasket.

NOTE: Clamp can be reversed.

| | | | |
|--------|---|--------|---------|
| A SIZE | 02(50) | 03(80) | 04(100) |
| B | 4(100) for Caulk, NO-HUB and Speedi-Set 3(76) for Threaded | | |

REGULARLY FURNISHED:

Duco Cast Iron Body and Flashing Clamp with Bronze Standpipe and Polished Bronze Dome.

NOTE: Dimensions shown in parentheses are in millimeters.

VARIATIONS:

- Longer Standpipe (When Specified)
- Solid Standpipe -SP
- Standpipe Covered w/SS Mesh -SSM
- L Speedi-Set Service Weight
- LXH Speedi-Set Extra Heavy
- T Threaded Outlet

OPTIONAL MATERIALS:

- Chrome Plated Dome -CPD
- Galvanized Body -G
- Nickel Bronze Dome and Stainless Steel Standpipe -NBD
- Rough Bronze Dome -RBD

2680

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

DRAWING NUMBER
S2680

SIZE
A

SCALE:
NONE

DATE:
5-17-85

APPROVED BY:
TD

CHECKED BY:
TD

DRAWN BY:
PJ

FIGURE NUMBER

| | | | | |
|------|----------|---|-----|---------|
| B | 5-22-95 | Revised and added millimeters Submittal Update | CMB | BS |
| A | 11-17-93 | | EMB | BS |
| REV. | DATE | DESCRIPTION | BY | CKD. BY |

WEIGHT
POUNDS

VOLUME
CUBIC FEET

FIGURE NUMBER

2680