

DRAWING NUMBER
5572, 5573

SIZE
A

SCALE:
NONE

DATE:
7-7-11

APPROVED BY:
CL

CHECKED BY:
CL

DRAWN BY:
TBW

5572, 5573

FIGURE NUMBER


WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

MILD CLIMATE ANTI-SIPHON SILLCOCK

BOX TYPE WITH CONCEALED HOSE CONNECTION

FUNCTION: For installation in interior and exterior wall locations of buildings that are not subject to freezing. Vacuum breaker prevents contamination of potable water supply and conforms to the requirements of ASSE Standard 1011. The stainless steel recessed box conceals the nozzle and operating mechanism. The locking cover prevents unauthorized use.

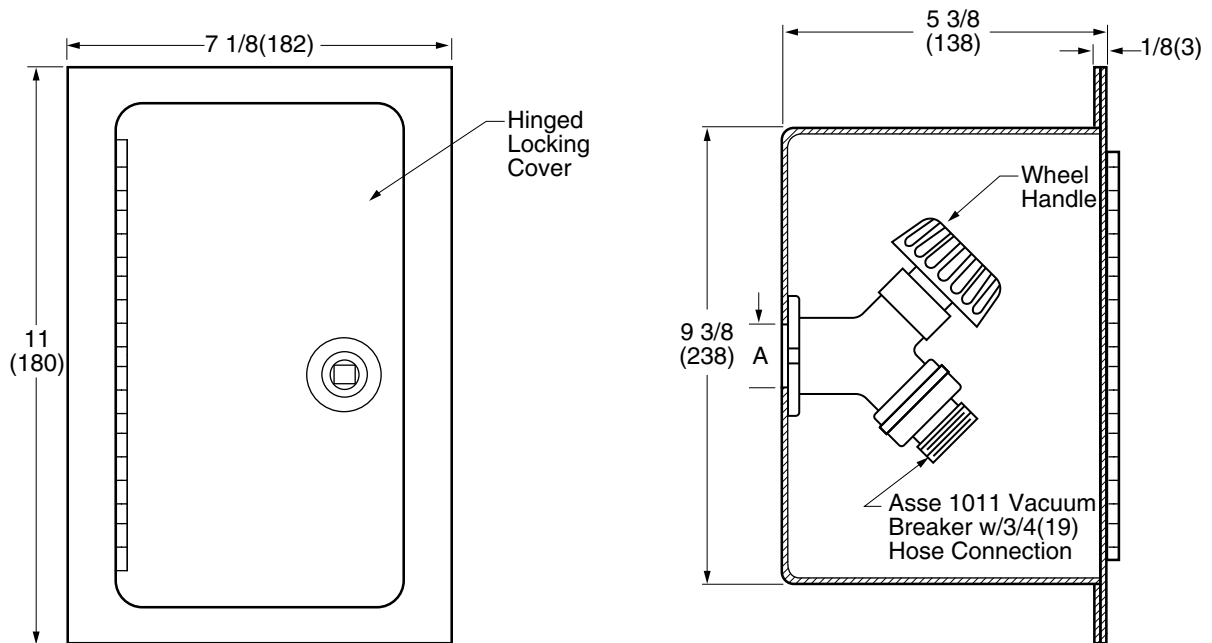

A (Inlet Size) = 1/2(13) or 3/4(19)

- Fig. 5572..... 1/2"(13) Female NPT Inlet
- Fig. 5573..... 3/4"(19) Female NPT Inlet

NOTES:

1. Recommended wall opening 9 3/4"(250) x 6"(150).
2. The AB1953, California Lead Law, and NSF/ANSI Standard 61-2008 - Drinking Water Components are not applicable to Jay R. Smith hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
3. Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Hose Valve has a Rough Finish Brass Body Removable Wheel Handle, "T" Handle Key, NPT Female Threaded Inlet Size Indicated by Figure Number Selected, ASSE 1011 Vacuum Breaker with 3/4"(19) Hose Connection and Stainless Steel Box with Full 180° Cover Opening.

VARIATIONS:

- Dual Check Valve -BFP

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							5572, 5573