


# FREEZELESS SILLCOCK

**FUNCTION:** For installation in interior or exterior building walls where an exposed hose connection is acceptable. Self-Draining feature provides positive non-freeze protection and integral vacuum breaker provides backflow protection.

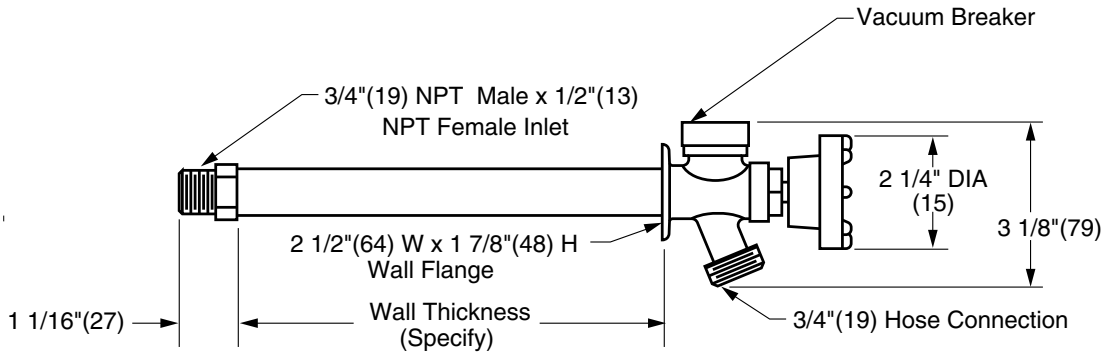

<input type="checkbox"/>	Fig. 5630-04.....	4(100) Wall Thickness
<input type="checkbox"/>	Fig. 5630-06.....	6(150) Wall Thickness
<input type="checkbox"/>	Fig. 5630-08.....	8(205) Wall Thickness
<input type="checkbox"/>	Fig. 5630-10.....	10(255) Wall Thickness
<input type="checkbox"/>	Fig. 5630-12.....	12(305) Wall Thickness

**NOTES:**

1. Recommended wall opening 1 1/4"(32). Hydrant shall be installed in horizontal position only with hose connection pointing down.
2. When ordering, specify wall thickness in 02"(51) increments as follows: 04(100), 06(150), 08(205) 10(255) or 12 (305).
3. All Jay R. Smith hydrants are manufactured with "NO-LEAD" brazing rings and USDA approved lubricants.
4. The AB1953, California Lead Law and NSF/ANSI Standard 61-2008 - Drinking Water Components are not applicable to Jay R. Smith hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
5. Dimensions shown in parentheses are in millimeters.

**REGULARLY FURNISHED:**

Rough Bronze Chrome Plated Non-Freeze Hydrant with Integral Wall Flange and Vacuum Breaker, Wheel Handle and 3/4"(19) Hose Connection.

DRAWING NUMBER  
5630

SIZE  
A

SCALE:  
NONE

DATE:  
6-16-11

APPROVED BY:  
CL

CHECKED BY:  
CL

DRAWN BY:  
TBW

FIGURE NUMBER  
5630

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY

WEIGHT POUNDS

VOLUME CUBIC FEET

FIGURE NUMBER <b>5630</b>
------------------------------