

G
 DRAWING NUMBER S8380
 SIZE A
 SCALE: NONE
 DATE: 11-7-85
 APPROVED BY: McD
 CHECKED BY: BS
 DRAWN BY: VGD
 FIGURE NUMBER 8380

SMITH® JAY R. SMITH MFG. CO.®
 DIVISION OF SMITH INDUSTRIES, INC.
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



LOCATION

GREASE INTERCEPTORS

WITH RECEIVING CRADLE WITH INTEGRAL DRIP PAN

FUNCTION: The all-steel receiving cradle with integral drip pan provides positive support for the interceptor and adjustability for the inlet and outlet connections to meet the drainage piping. The receiving cradle can be set in the slab at the time of the pouring or set in a pre-sleeved opening in the rough slab. The receiver is secured and suspended in the rough slab by its anchoring flange. The interceptor body is lowered into the receiving cradle and adjusted to the connecting drainage piping. Interceptor is readily accessible for cleaning and inspection simply by removing the cover which sits flush with the floor.

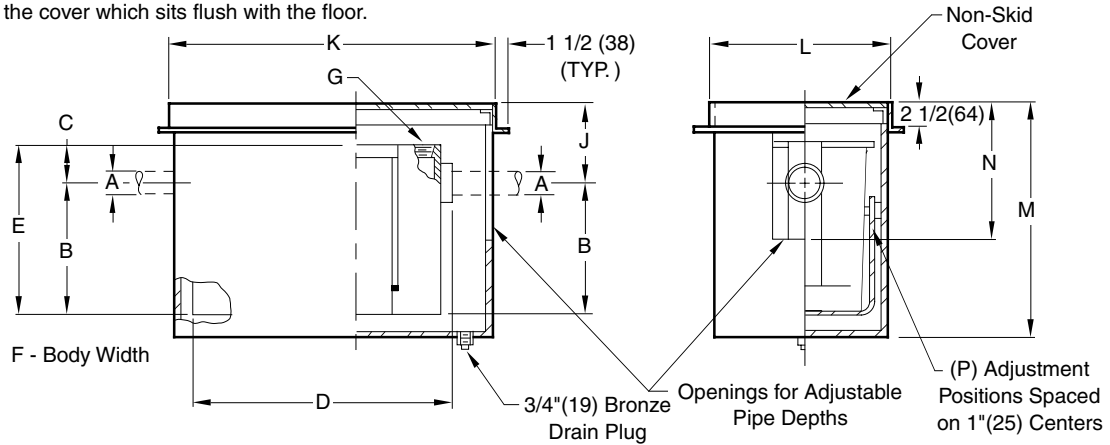


Fig No.	GPM Flow Rate	Grease Cap Lbs.	Inlet and Outlet Size	Dimensions						C.O. PLUG SIZE	Cradle Dimensions						
				Roughing Dimensions				Body			JΔ		K	L	MΔ	NΔ	P
				A*	B	C	D	E	F		Height	Width					
8380-04	4	8	02 (50)	7 3/4 (195)	3 1/4 (83)	16 3/4 (425)	11 (280)	10 (255)	2 (51)	7 (180)	17 3/4 (450)	23 (585)	17 (430)	26 1/2 (675)	17 3/4 (450)	12 (305)	
8380-07	7	14	02 (50)	8 1/2 (215)	3 1/2 (89)	19 (485)	12 1/8 (308)	10 3/4 (275)	2 (51)	7 (180)	16 (405)	23 (585)	17 (430)	26 (660)	17 (430)	12 (305)	
8380-10	10	20	02 (50)	9 1/2 (240)	3 3/4 (95)	21 1/4 (540)	13 3/8 (340)	13 (330)	2 (51)	7 1/2 (190)	18 1/2 (470)	23 (585)	17 (430)	26 (660)	17 (430)	12 (305)	
8380-15	15	30	02 (50)	12 (305)	3 1/2 (89)	25 (635)	15 1/2 (395)	14 (355)	2 (51)	7 1/2 (190)	17 1/2 (445)	31 3/4 (805)	24 1/8 (613)	31 1/4 (795)	20 1/2 (520)	13 (330)	
8380-20	20	40	03 (75)	13 (330)	4 (100)	28 1/2 (725)	17 (430)	15 3/4 (400)	2 (51)	7 1/2 (190)	19 1/2 (495)	31 3/4 (805)	24 1/8 (613)	31 1/4 (795)	20 1/2 (520)	13 (330)	
8380-25	25	50	03 (75)	15 1/4 (390)	4 1/2 (115)	30 (760)	19 5/8 (498)	16 3/4 (425)	2 (51)	8 1/4 (210)	18 3/4 (475)	37 (940)	26 5/8 (676)	35 1/2 (900)	22 (560)	13 (330)	
8380-35	35	70	03 (75)	16 (405)	5 (125)	32 1/2 (825)	21 (535)	18 1/4 (465)	2 (51)	10 1/4 (260)	17 1/4 (440)	37 (940)	26 5/8 (676)	35 1/2 (900)	22 (560)	13 (330)	
8380-50	50	100	03 (75)	17 1/2 (445)	6 3/4 (170)	35 1/2 (900)	24 1/4 (620)	20 3/4 (525)	2 (51)	16 (405)	25 (635)	39 (990)	26 (660)	38 1/2 (980)	22 3/4 (580)	13 (330)	

Δ When tile top is specified add 1" (25). When terrazzo top is specified add 1 1/4" (32)
 * Larger inlet and outlet sizes available when specified.

REGULARLY FURNISHED:

Fab. Steel Fully Enclosed Cradle with Integral Drip Pan with Gray Duco Coating Inside and Outside.
 Interceptor with Flow Control Fitting.

VARIATIONS:

- Δ Cover Recessed for Terrazzo Ceramic or Quarry Tile -QC
- Δ Cover Recessed for Vinyl or Asphalt Tile -T C
- Lift Out Sediment Bucket -B
- NO-HUB Adaptor (2) Required (Specify Fig. 2646Y)

OPTIONAL MATERIALS:

- Acid Resistant Coating Inside** -ARI
- Acid Resistant Coating Outside** -AROΔ
- Acid Resistant Coating Inside and Outside** -ARIOΔ
- Acid Resistant Coated Cradle -ARC
- Aluminum Cover for Cradle -ACC
- Aluminum Cover for Interceptor -AC

**Interceptor Only
 Δ When ARO or ARIO is specified, ARC must also be specified.

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							8380

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA