



LOCATION

GREEN ROOF MAIN AREA DRAIN WITH STANDPIPE

DRAWING NUMBER
s1900

SIZE
A

SCALE:
NONE

DATE:
10-4-06

APPROVED BY:
CEL


CHECKED BY:
CL

DRAWN BY:
RN

FIGURE NUMBER
1900

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

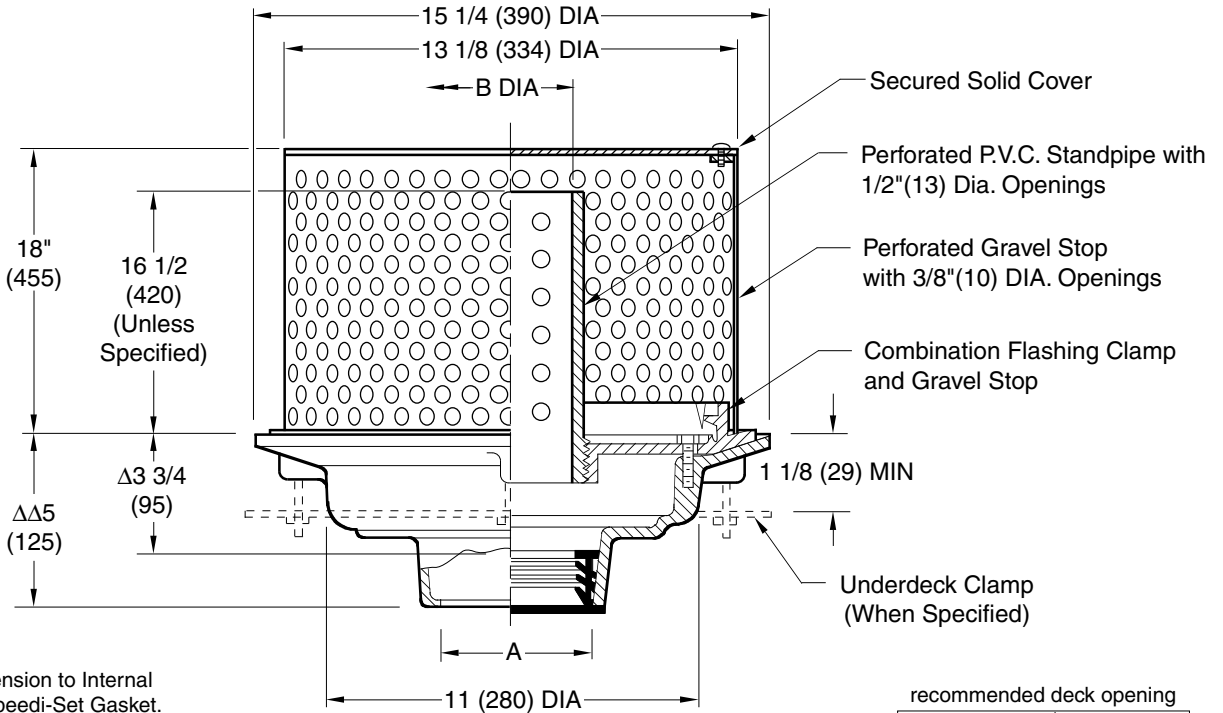

Δ This Dimension to Internal Stop of Speedi-Set Gasket.
 ΔΔ Same for Caulk, NO-HUB and Speedi-Set. 3 3/4 (95) for Threaded.

recommended deck opening	
with suffix -R	17 (430) DIA
less Suffix -R	14 (355) DIA

A(Pipe Size)	02(50)	03(75)	04(100)	05(125)	06(150)	08(200)
B (DIA)	4(100)	4(100)	4(100)	6(150)	6(150)	8(200)

- Fig. 1900C CAULK OUTLET
- Fig. 1900Y NO-HUB OUTLET

REGULARLY FURNISHED:
 Duco Cast Iron Body, Flashing Clamp and Stainless Steel Perforated Gravel Stop with 3/8"(10) DIA. Openings and Secured Solid Cover and P.V.C. Perforated Internal Standpipe.

- VARIATIONS:**
- "L" Shaped Underdeck Clamp -CL
 - L Speedi-Set Service Weight
02(50), 03(75) & 04(100) sizes only
 - LXH Speedi-Set Extra Heavy
02(50), 03(75) & 04(100) sizes only
 - Sump Receiver -R
 - Underdeck Clamp -C
 - T Threaded Outlet

- OPTIONAL MATERIALS:**
- Galvanized Cast Iron Body and Collar -G

NOTE: Dimensions shown in parentheses are in millimeters.

C	04/19/10	Added 16 1/2 unless specified	JJ	TK	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1900
B	03/25/10	Removed SQ note	JJ	TK			
A	10/29/09	Renamed as 1900	JJ	TK			
REV.	DATE	DESCRIPTION	BY	CKD. BY			