

F


**SMITH® JAY R. SMITH MFG. CO.®**  
 DIVISION OF SMITH INDUSTRIES, INC.  
 POST OFFICE BOX 3237  
 MONTGOMERY, ALABAMA 36109-0237 (USA)  
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



LOCATION

# DRAIN FOR FLOATING (ISOLATED) FLOOR SYSTEMS

**FUNCTION:** Used in areas which may have to be isolated from the other parts of the building; such as mechanical equipment rooms, studios, music rooms, laboratories and data processing areas.

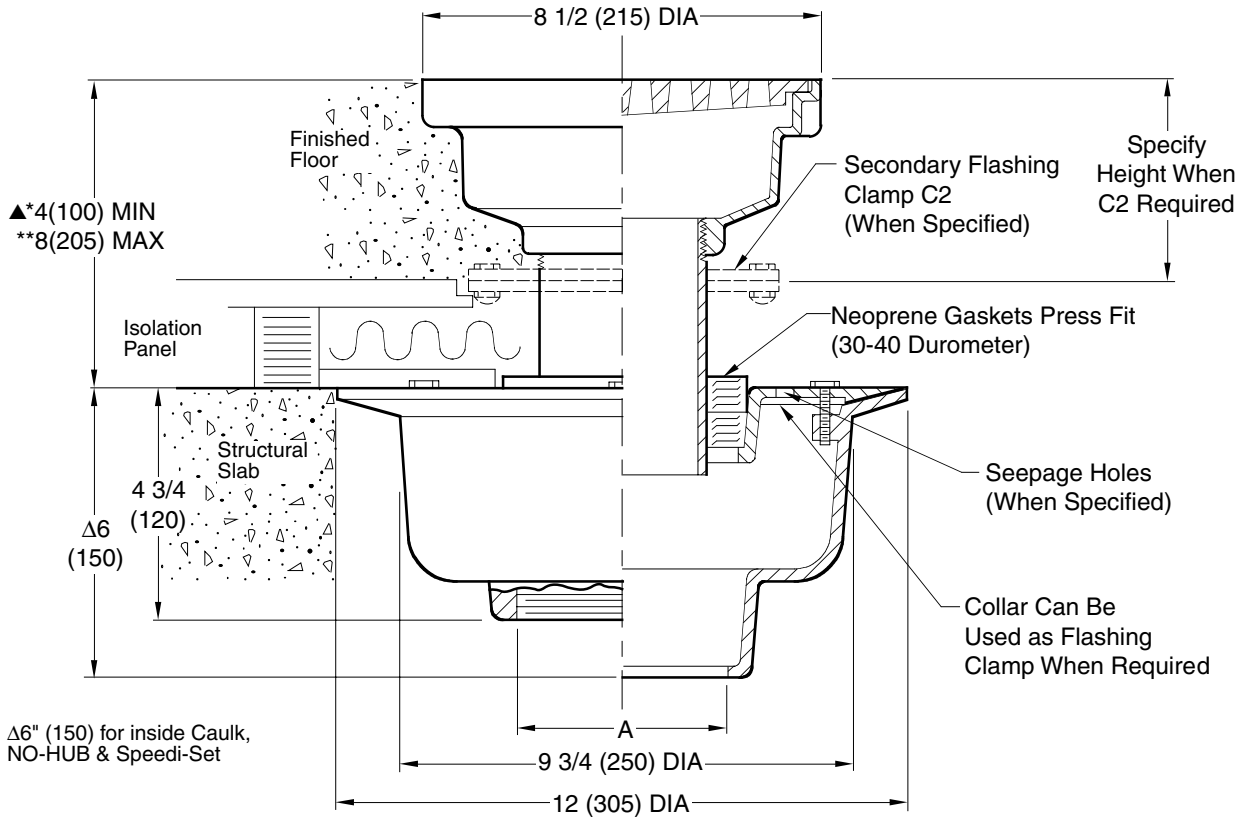

NOTE: \*Add 1/4" (6) for Nickel Bronze or Polished Bronze Top.  
 \*\*If greater dimension than shown from lower flange to top is required specify a longer nipple.  
 ▲ Nipple may require cutting to achieve minimum dimension.

A (Pipe Size) = 02(50), 03(75), 04(100)

Fig. 9340C . . . CAULK  
 Fig. 9340T . . . THREADED

**REGULARLY FURNISHED:**

Duco Cast Iron Lower Body and Flashing Collar, Adjustable Nipple, Upper Body, Grate and Neoprene Isolation Gaskets.

**VARIATIONS:**

- Safe-Set Sediment Bucket -B (Fig. 9341)
- Secondary Flashing Clamp -C2
- Seepage Holes (in collar) -WSH
- Sump Receiver Plate -R
- Underdeck Clamp -C
- L Speedi-Set Service Weight  
02(50), 03(75) & 04"(100) sizes only
- LXH Speedi-Set Extra Heavy  
02(50), 03(75) & 04"(100) sizes only
- Y NO-HUB Outlet

**OPTIONAL MATERIALS:**

- Galvanized Cast Iron -G (Lower Body)
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER  
S9340

SIZE  
A

SCALE:  
NONE

DATE:  
11-12-84

APPROVED BY:  
TD

CHECKED BY:  
VGD

DRAWN BY:  
PJ

9340

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY
F E	05/31/00 5-15-00	Changed Metric Equivalents Added note	JJ SA	BS BS

WEIGHT POUNDS	VOLUME CUBIC FEET

FIGURE NUMBER <b>9340</b>
------------------------------