

D

SMITH® JAY R. SMITH MFG. CO.®
 DIVISION OF SMITH INDUSTRIES, INC.
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



MEMBER OF:

LOCATION

DRAWING NUMBER
S9345

SIZE
A

SCALE:
NONE

DATE:
11-12-84

APPROVED BY:
TD

CHECKED BY:
VGD


DRAWN BY:
PJ

9345

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DRAIN FOR FLOATING (ISOLATED) FLOOR SYSTEMS

FUNCTION: Used in areas which may have to be isolated from the other parts of the building; such as mechanical equipment rooms, studios, music rooms, laboratories and data processing areas.

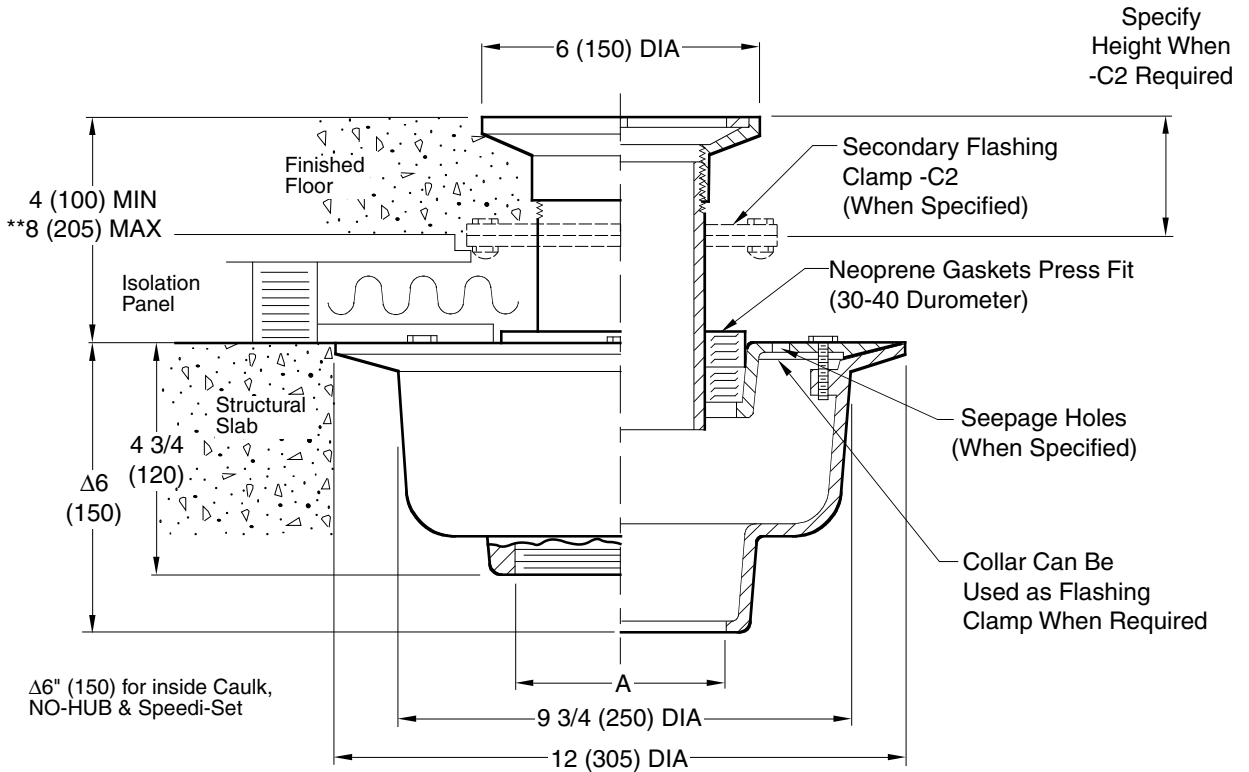

A (Pipe Size) = 02(50), 03(75), 04(100)

**If greater dimension than shown from lower flange to top is required specify a longer nipple.

- Fig. 9345C ... CAULK OUTLET
- Fig. 9345T ... THREADED OUTLET

REGULARLY FURNISHED:

Duco Cast Iron Lower Body and Flashing Collar, Duco Cast Iron Top Drain Body with Polished Bronze Top and Neoprene Isolation Gasket.

VARIATIONS:

- Secondary Flashing Clamp -C2
- Sump Receiver Plate -R
- Underdeck Clamp -C
- Seepage Holes (in collar) -WSH
- Safe-Set Sediment Bucket -B (Fig. 9341)
- L Speedi-Set Service Weight 02(50), 03(75) & 04"(100) sizes only
- LXH Speedi-Set Extra Heavy 02(50), 03(75) & 04"(100) sizes only
- Y NO-HUB Outlet

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G (Lower Body)
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

NOTE: Dimensions shown in parentheses are in millimeters.

FIGURE NUMBER	D C B A	12/13/00 04/17/00 08/11/97 02/21/95	Changed Note & Furnished Changed Metric Equivalents Chg'd Title Submittal Update	RN JJ EMB EMB	CL BS BS BS	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 9345
REV.	DATE	DESCRIPTION	BY	CKD. BY				