


ADJUSTABLE RECIRCULATING FITTINGS

FUNCTION: Used as inlet supply fittings where a shallow body with provisions for flashing is required. Adjustable head adjusts to various finish thickness. Fig. 6180 has a shutter type manual closure which is used to regulate flow.

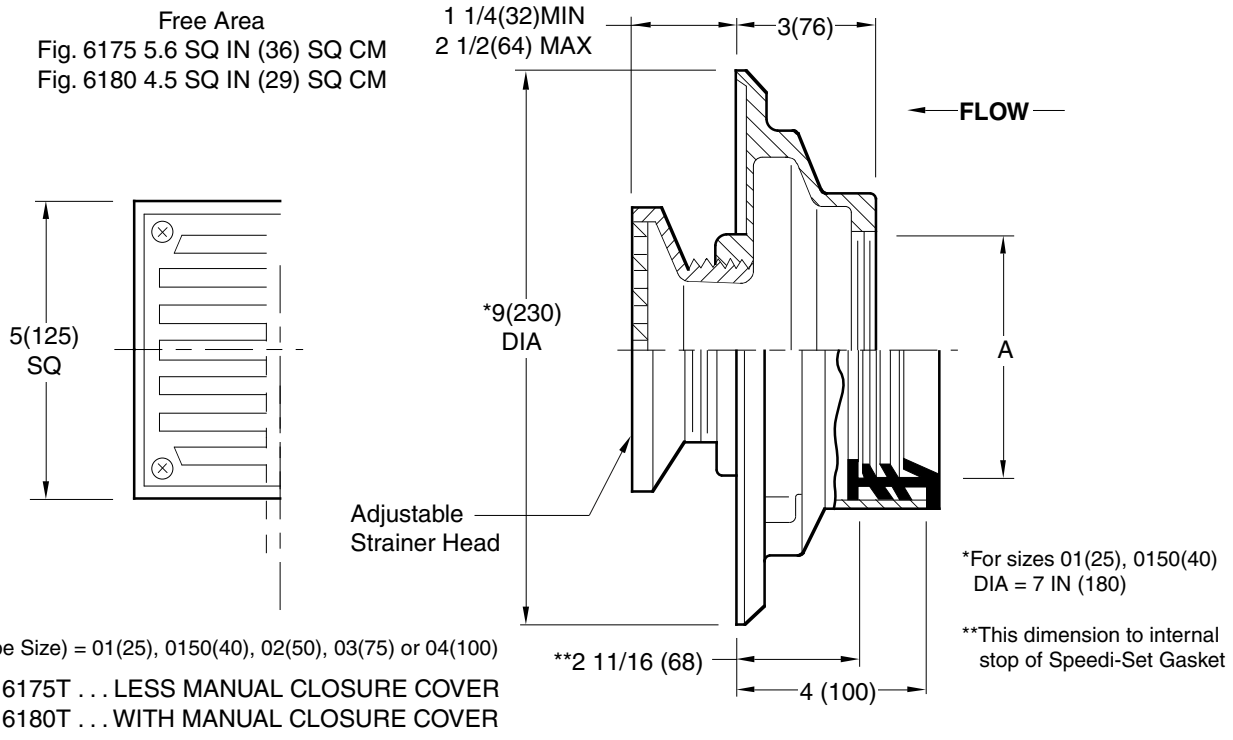

REGULARLY FURNISHED:
 Duco Cast Iron Body with Secured
 Chrome Plated Bronze Face

- VARIATIONS:**
- Flashing Clamp -C
 - C Caulk Outlet
 - L Speedi-Set Service Weight
02"(50), 03"(75) & 04"(100) sizes only
 - LXH Speedi-Set Extra Heavy
02"(50), 03"(75) & 04"(100) sizes only
 - Vandal Proof Screws -U
 - Y NO-HUB Outlet
02"(50), 03"(75) & 04"(100) sizes only

OPTIONAL MATERIALS:

- Galvanized Cast Iron Body -G
- Nickel Bronze Face -NB
- Polished Bronze Face -PB

NOTE: This product does not conform to or meet the requirements of ASME Standard No. A112.19.8-2007, titled "Suction Fittings for Use in Swimming Pools, Wading Pools, Spas, and Hot Tubs." This product shall not be used in any installation in swimming pools, wading pools, spas, hot tubs as well as other aquatic facilities. Due to the potential endangerment from arduous and forceful suction, entrapment or entanglement regardless of whether it is hair, head, limbs or other body parts, this product is prohibited from installation in these applications.

NOTE: Dimensions shown in parentheses are in millimeters.

FIGURE NUMBER **6175/6180**

DRAWN BY: BS

CHECKED BY: DT

APPROVED BY: SJM

DATE: 4-13-83

SCALE: NONE

SIZE: A

DRAWING NUMBER: S6175

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

E	1/5/09	Revised Function & Heading	RN	CL	WEIGHT	VOLUME	FIGURE NUMBER
D	12/17/08	Revised Variations	RN	CL	POUNDS	CUBIC FEET	6175/6180
C	12/08/08	Revised Variations	RN	CL			
B	11/20/08	Added ASME Note	JJ	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			