

E



JAY R. SMITH MFG. CO.®
 DIVISION OF SMITH INDUSTRIES, INC.
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



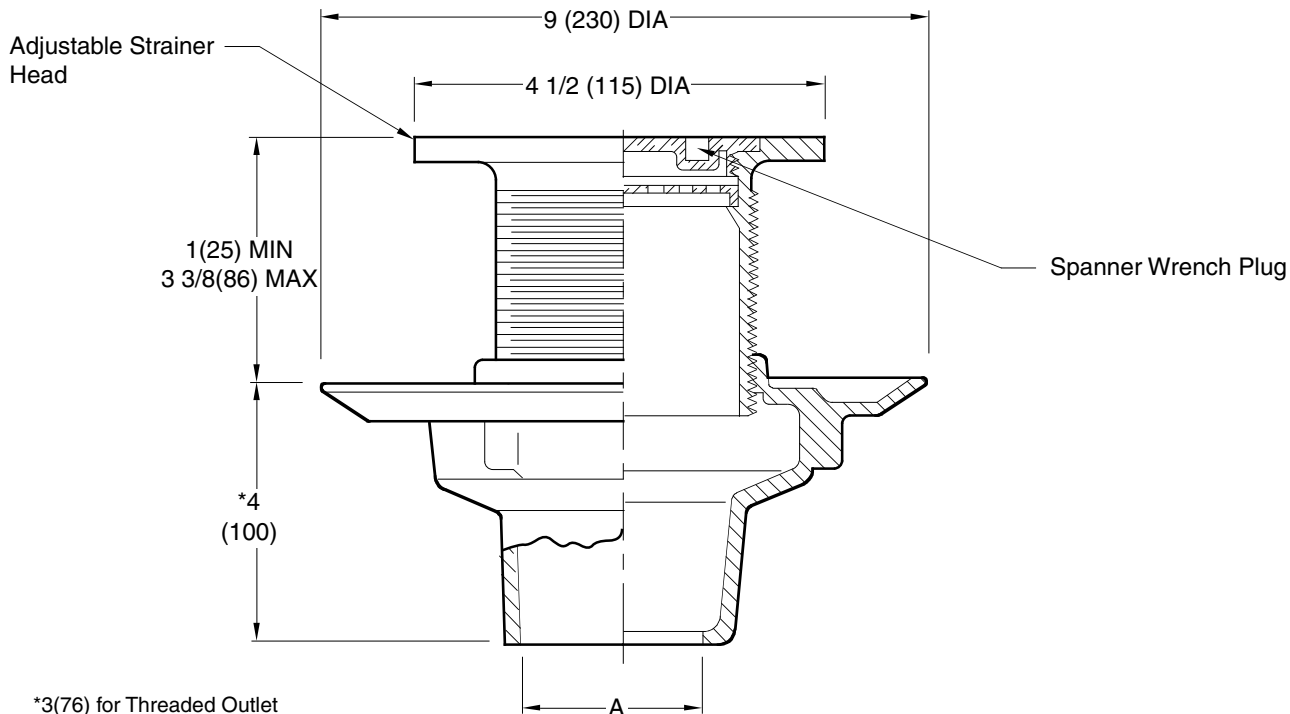
MEMBER OF:



LOCATION



FOOT BATH DRAIN

FUNCTION: Used for antiseptic foot baths which are normally filled, but must be periodically emptied for cleaning. During use removable non-slip plug is set in place. When receptor is to be drained plug is removed exposing a recessed grate which permits drainage and excludes the entrance of debris.



*3(76) for Threaded Outlet

A (PIPE Size) = 02(50), 03(75) or 04(100)

 Fig. 6390C . . . CAULK OUTLET
 Fig. 6390Y . . . NO-HUB OUTLET




REGULARLY FURNISHED:

Duco Cast Iron Body with Chrome
 Plated Bronze Top and Spanner
 Wrench for Plug Removal.

VARIATIONS:

 Flashing Clamp -C
 T Threaded Outlet

OPTIONAL MATERIALS:

 Galvanized Body -G
 Nickel Bronze Top -NB
 Polished Bronze Top -PB

NOTE: This product does not conform to or meet the requirements of ASME Standard No. A112.19.8-2007, titled "Suction Fittings for Use in Swimming Pools, Wading Pools, Spas, and Hot Tubs." This product shall not be used in any installation in swimming pools, wading pools, spas, hot tubs as well as other aquatic facilities. Due to the potential endangerment from arduous and forceful suction, entrapment or entanglement regardless of whether it is hair, head, limbs or other body parts, this product is prohibited from installation in these applications.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER
S6390SIZE
ASCALE:
NONEDATE:
4-6-83APPROVED BY:
SJMCHECKED BY:
DTDRAWN BY:
BS

6390

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

E	12/17/08	Revised Pipe Size	RN	CL
D	11/20/08	Added ASME Note	JJ	CL
C	6-3-08	Revised Dwg.	RN	CL
REV.	DATE	DESCRIPTION	BY	CKD. BY

WEIGHT
POUNDSVOLUME
CUBIC FEET

FIGURE NUMBER

6390