


ROOF DRAIN WITH SQUARE DOME

FOR IRMA ROOFS USING SQUARE BALLAST PAVERS

FUNCTION: Used on roof systems where the insulated membrane assembly method of waterproofing is provided.

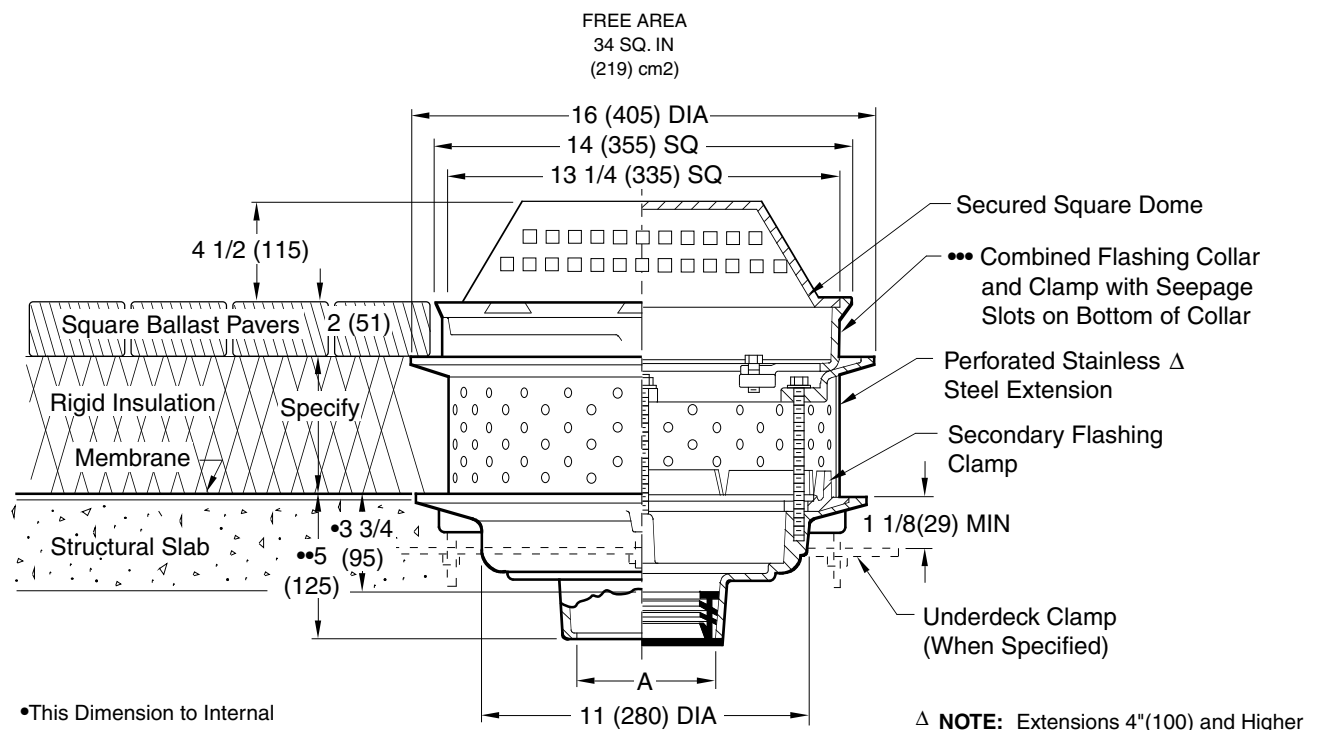

- This Dimension to Internal Stop of Speedi-Set Gasket
- Same for Caulk, NO-HUB and Speedi Set. 3 3/4(95) for Threaded.
- Specify Suffix-W for Applications Requiring "Loose-Set" Pavers.

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) and 06(150)

CAULK REGULAR

△ **NOTE:** Extensions 4"(100) and Higher are Regularly Furnished Perforated Stainless Steel. Extensions Less Than 4"(100) are Regularly Furnished Cast Iron with 2 Rows of Seepage Holes.

REGULARLY FURNISHED:
 Duco Cast Iron Body with Perforated Stainless Steel Δ Extension, Cast Iron Secondary Flashing Clamp (-C2), Cast Iron Top Collar with Square 4 1/2"(115) High Secured Cast Iron Dome.

- VARIATIONS:**
- Underdeck Clamp -C
 - Sump Receiver -R
 - "L" Shaped Underdeck Clamp -CL
 - Expansion Joint (Specify Fig. 1710)
 - Threaded Outlet (T)
 - Speedi-Set Outlet (94)(2,3 and 4" sizes only. Specify XH or SW)
 - Cast Iron Extension with 2 Rows of Seepage Holes. Δ -EO2 (2") [(51)] -EO3 (3") [(75)] etc.
 - □ 3/8" (10) Dia. Holes- (8) Req'D -W

recommended deck opening

with suffix-R	17(430) DIA
less suffix-R	14(355) DIA

NOTE: Dimensions shown in parentheses are in millimeters unless otherwise specified.

DRAWING NUMBER: **SSQ-1-1363**
 SIZE: **A**
 SCALE: **NONE**
 DATE: **5/11/92**
 APPROVED BY: **CS**
 CHECKED BY: **JCS**
 DRAWN BY: **TWK**
SQ-1-1363
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

B	9-15-98	Rev. Dwg. & added milli.	CMD	JCS	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
A	6-15-92	Rev. Dwg.	TWK	JCS			SQ-1-1363
REV.	DATE	DESCRIPTION	BY	CKD. BY			