


ROOF DRAINS

SPECIAL ROOF APPLICATIONS

FUNCTION: Used on roof systems where the insulated membrane assembly method of waterproofing is provided, using built-up felt and asphalt. The adjustable extension sleeve permits adjustment from a min. of 1 1/4"(32) to max. of 4 "(100), easily accommodating 2 3/4"(70) of varying insulation thicknesses. The positive threading allows smooth perimeter movement and circumferential support of the top of any adjusted elevation. A 4"(100) high perforated stainless steel gravel guard is supplied to retain the crushed gravel used in flat roof construction.

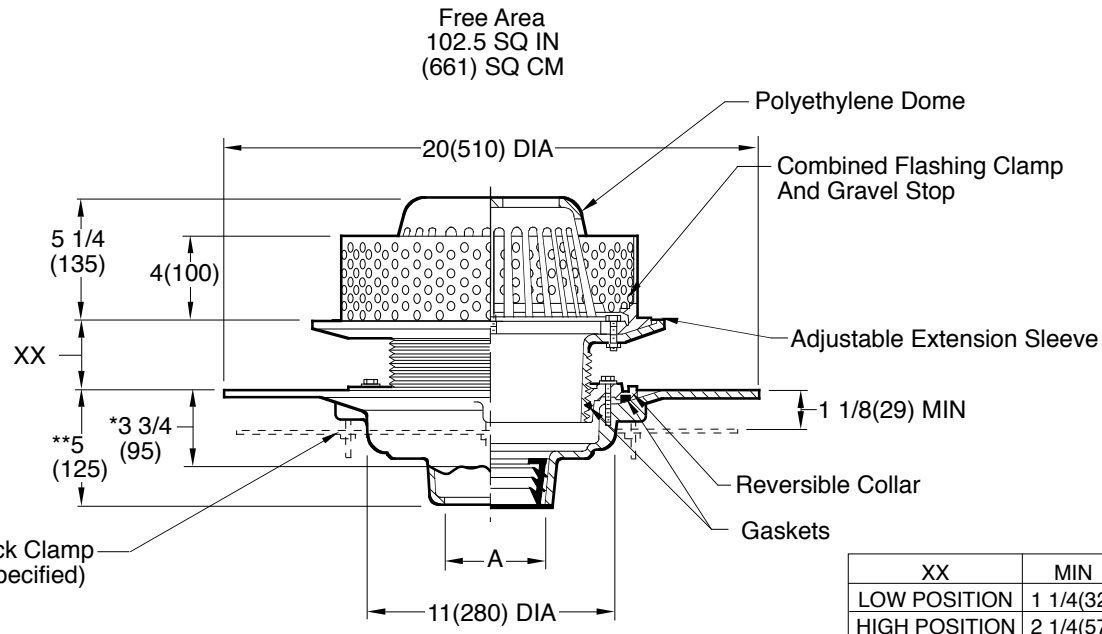

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

*This dimension to internal stop of Speedi-Set Gasket
 **Same for Caulk, NO-HUB and Speedi-Set, 3 3/4(95) for Threaded

Fig. 1039C CAULK OUTLET
 Fig. 1039Y NO-HUB OUTLET

NOTE: Stated flow rates for roof drains are based on particular test piping configurations and dimensions. Installed roof drain flow rates cannot be stated unless the attached piping configuration is known and the effects of the drainage calculated.

NOTE: Recommended deck opening 14 3/4"(375).

REGULARLY FURNISHED:
 Duco Cast Iron Body with Adjustable Extension Sleeve, 1/16"(2) Thick 4"(100) High Stainless Steel Perforated Gravel Guard with 3/8"(10) DIA Openings, Flashing Clamp and Polyethylene Dome.

- VARIATIONS:**
- Expansion Joint (Specify Fig. 1710)
 - Higher Gravel Stop (Specify) -HGS
 - "L" Shaped Underdeck Clamp -CL
 - L Speedi-Set Service Weight 02(50), 03(80) & 04"(100) sizes only
 - LXH Speedi-Set Extra Heavy 02(50), 03(80) & 04"(100) sizes only
 - Underdeck Clamp -C
 - Vandal Proof Dome -U
 - T Threaded Outlet

- OPTIONAL MATERIALS:**
- ▲ Aluminum Dome -AD
 - ▲ Cast Iron Dome -CID
 - Galvanized Cast Iron -G
 - ▲ Rough Bronze Dome -RBD

▲ Optional domes' free area are as follows:
 Aluminum 98 (632)
 Cast Iron 80 (516)
 Bronze 95 (613)

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S1039
 SIZE: A
 SCALE: NONE
 DATE: 10-8-87
 APPROVED BY: CR
 CHECKED BY: BS
 DRAWN BY: EMB
 FIGURE NUMBER: 1039

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

D	9-17-15	Added Flow Rate Note	TBW	BW	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1039
C	06/04/09	Added Optional Dome Notes	JJ	CL			
B	6-506	Revised Dim	TBW	AM			
A	5-17-95	Revised and added millimeters	CMB	BS			
REV.	DATE	DESCRIPTION	BY	CKD. BY			