SMITH® JAY R. SMITH MFG. CO.®
MEMBER OF MORRIS GROUP INTERNATIONAL
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com
CUSTOMER DRIVEN SINCE 1926
MEMBER OF:

LOCATION

FLOOR DRAINS
WITH 8 1/2" (215) ROUND TOPS

MEDIUM DUTY DRAINS

Load Rating: Medium Duty having a Safe Live (Static) Load between 2,000 lbs. (900 kg) and 4,999 lbs. (2,250 kg) per ASME A112.6.3 Floor Drain Standard. For the specific Safe Live Load rating of any grate, contact the Smith representative or factory direct.

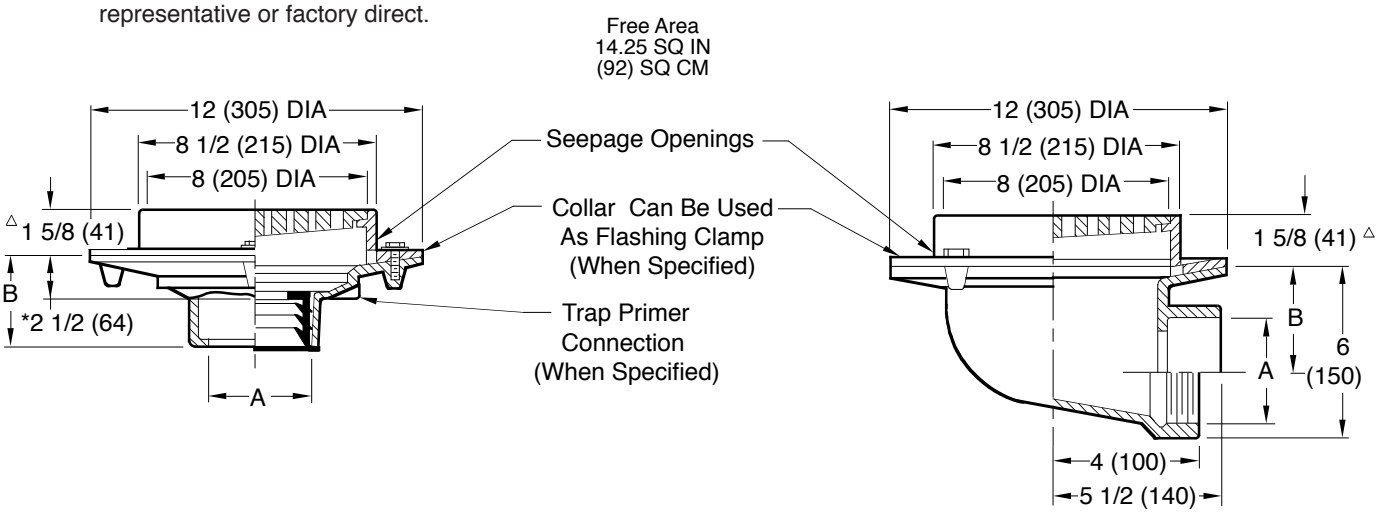

** ☐ **Fig. 2110C . . . CAULK OUTLET**
☐ **Fig. 2110Y . . . NO-HUB OUTLET**

☐ **Fig. 2115C . . . CAULK OUTLET**
☐ **Fig. 2115T . . . THREADED OUTLET**

A SIZE	02 (50)	03 (75)	04 (100)	06 (150)
B	3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set®, 2 (51) for Threaded			3 3/4 (95) NO-HUB Only

A SIZE	02 (50)	03 (75)	04 (100)
B	4 1/4 (110)	3 3/4 (95)	3 1/4 (83)

REGULARLY FURNISHED:
Duco Cast Iron Body and Flashing Collar with Cast Iron Slotted ADA Grate.

△ Add 3/16" (5) when bronze top is specified.

*This dimension to internal stop of Speedi-Set® gasket.
**Meets U.S. Gov't Spec. per WW-P-541-b, Type 220, 02 (50) and 03" (75) sizes only. See Fig. 2130 for 04" (100) size.

Meets ANSI Spec A112.6.3-2001 02(50), 03(75) or 04"(100) sizes only.

VARIATIONS:
- ☐ Closure Plug -XP (Fig. 2110 only)
- ☐ Dome Grate -D
- ☐ Flat Bottom Strainer -FBS (Fig. 2110 only)
- ☐ L Speedi-Set® Service Weight (Fig. 2110 only)
- ☐ LXH Speedi-Set® Extra Heavy (Fig. 2110 only)
- ☐ NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2115 only)
- ☐ Sediment Bucket -B
- ☐ Square Top -S
- ▲ ☐ Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)
- ☐ Vandal Proof Grate -U
- ☐ Wide Flange Deck Drain (Specify Fig. DX2565)
- ☐ T Threaded Outlet
- ☐ Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2110 Only)
- ☐ Heel Proof Grate -Q45

OPTIONAL MATERIALS:
- ☐ Ductile Iron Grate -M
- ☐ Galvanized Cast Iron -G
- ☐ Nickel Bronze Top -NB
- ☐ Polished Bronze Top -PB
- ☐ Stainless Steel (Specify Fig. 9710)

▲Not available on Fig. 2110T threaded outlet drain.

NOTE: Dimensions shown in parentheses are in millimeters.

REV.	DATE	DESCRIPTION	BY	CKD. BY
Q	3-10-23	Added ® to "Speedi-Set"	KK	CL
P	1-23-23	Added ADA	KK	JT
N	4-5-22	Added -Q45 to Variations	KK	CL
M	7-19-19	Added Load Rating	MW	JM

WEIGHT POUNDS | VOLUME CUBIC FEET | FIGURE NUMBER **2110, 2115**

FIGURE NUMBER **2110, 2115** | DRAWN BY: PJ | CHECKED BY: TD | APPROVED BY: TD | DATE: 5-17-85 | SCALE: NONE | SIZE A | DRAWING NUMBER S2110 | Q

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov