

D

SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



LOCATION

DRAWING NUMBER
S2290

SIZE
A

SCALE:
NONE

DATE:
10-9-86

APPROVED BY:
TD

CHECKED BY:
VGD

DRAWN BY:
WAS

2290

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

HEAVY DUTY FLOOR DRAIN

Free Area
45 SQ IN
(290 SQ CM)

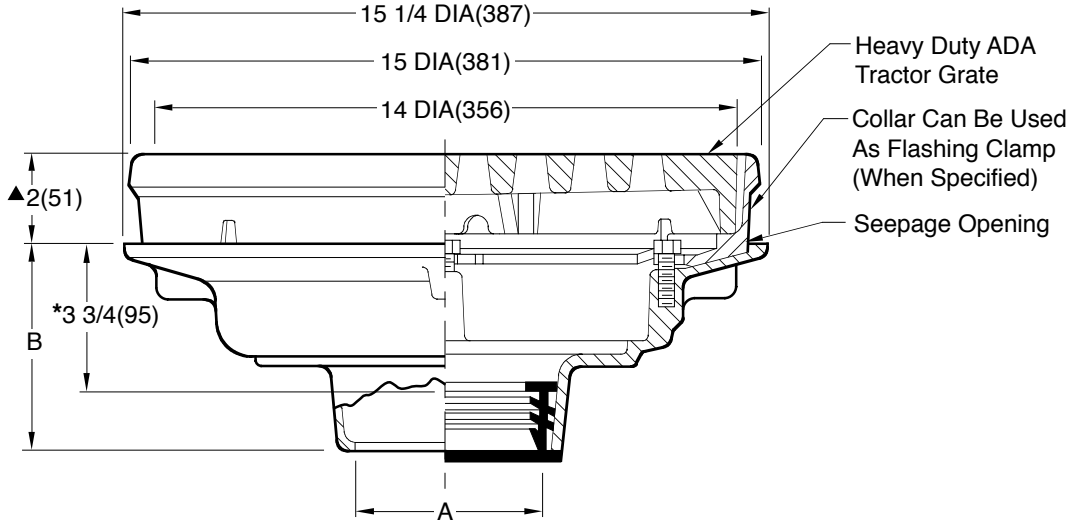


Fig. 2290C . . . CAULK OUTLET
 Fig. 2290Y . . . NO-HUB OUTLET

*This dimension to internal stop of Speedi-Set gasket.

▲ Add 1/4"(6) when bronze top is specified.

A SIZE	02(50), 03(75), 04(100), 05(125) or 06(150)	08(200)	10(250)
B	5(127) for Caulk, NO-HUB and Speedi-Set 3 3/4(95) for Threaded	6(150)	6(150)

REGULARLY FURNISHED:

Duco Cast Iron Body, Flashing Collar and Heavy Duty ADA Tractor Grate.

VARIATIONS:

- Dome Bottom Strainer -DBS
- Dome Grate -D
- Secondary Strainer -FBS
- Side Outlet
- Square Top -S
- Vandal Proof -U
- L Speedi-Set Service Weight (02(50), 03(75) & 04"(100) sizes only)
- LXH Speedi-Set Extra Heavy (02(50), 03(75) & 04"(100) sizes only)
- T Threaded Outlet
- Quad Close Trap Seal (Specify Fig. 2692)

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

NOTE: Floor drains or area drains used to drain areas subject to rainfall should have an open area equal to twice the cross sectional area of the connecting pipe.

NOTE Dimensions shown in parentheses are in millimeters.

D	2-4-16	Revised Table, Added Note Revised Variations Added ADA to Grate Submittal Update	TBW	BW	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 2290
C	6-17-15		TBW	CL			
B	11/18/10		JJ	CL			
A	12-29-94		EMB	BS			
REV.	DATE	DESCRIPTION	BY	CKD. BY			