



<b>B</b>	<b>JAY R. SMITH MFG. CO.®</b> <small>MEMBER OF MORRIS GROUP INTERNATIONAL          POST OFFICE BOX 3237          MONTGOMERY, ALABAMA 36109-0237 (USA)          TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com</small>	   <small>MEMBER OF:</small>	<b>LOCATION</b>
----------	---	---------------------------------------	-----------------

# DRYWALL ACCESS DOORS

DRAWING NUMBER **S4760**  
 SIZE **A**  
 SCALE: **NONE**  
 DATE: **3-5-15**  
 APPROVED BY: **SJM**  
 CHECKED BY: **JM**  
 DRAWN BY: **TBW**  
**4760**  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE  
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

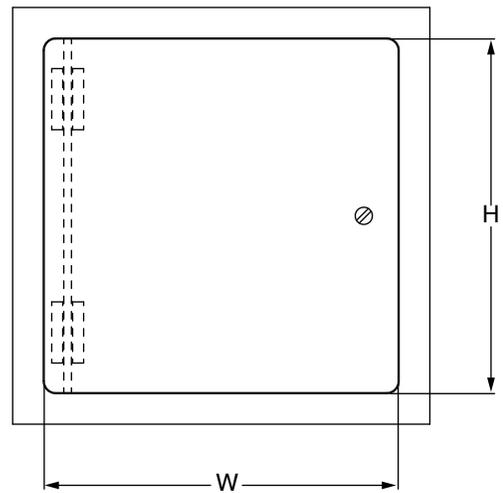

**FRONT VIEW**

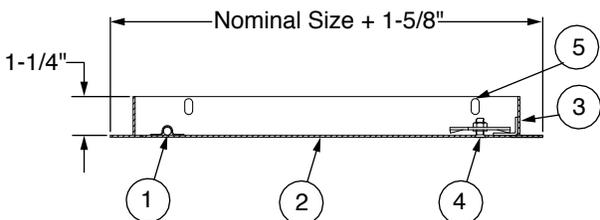

**SIDE VIEW**

**REGULARLY FURNISHED:**  
 Doors are ideally suited for new installations or for remodeling, in masonry, tile, wood or other wall and ceiling surfaces. Door features rounded safety corners. Door and frame are fabricated from 16 gage, galvanized steel with a prime coat finish. Frame is one piece construction, 1" wide and provides perfect concealment of the rough wall opening. Wall frame is provided with 1/4" mounting holes for fastening within the furred spaces allowing faster installation and fixing maximum clearance. Concealed pivoting rod hinge prevents distortion and closes door squarely. Doors 24" or larger are provided with a continuous piano hinge. Latch is screwdriver operated. Finish is a prime coat suitable for painting.

**GUIDE SPECIFICATIONS:**  
 Provide 4760 Series, Drywall Access Doors (specify options). Access door and frame shall be fabricated from 16 gage, galvanized steel with a prime coat finish. The door shall have rounded safety corners and a concealed pivoting rod hinge. Frame shall be one piece construction with no miters or welds on the face. Latch shall be screwdriver operated. Finish shall be a prime coat suitable for painting.

- ① Concealed pivoting rod hinge
- ② Door
- ③ Frame
- ④ Screwdriver operated latch
- ⑤ Mounting holes

- VARIATIONS:**
- Allen Key Latch -AKL
  - Cylinder Lock (one per door) -CL
  - Stainless Steel Construction (See Fig. 4762)

FIGURE NUMBER	<b>B</b>	5-21-19 7-29-15	Revised Variations Revised Variations	MW TBW	JM JM	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER <b>4760</b>
REV.	DATE	DESCRIPTION		BY	CKD. BY			



LOCATION

# DRYWALL ACCESS DOORS

**STANDARD AVAILABLE SIZES**  
 Special sizes available upon request

	NOMINAL DOOR SIZE (W X H)	CEILING OPENING (minimum required)	LATCHES	WEIGHT
4760	6" x 6"	6-1/2" x 6-1/2"	1	3 lbs.
4760	8" x 8"	8-1/2" x 8-1/2"	1	3 lbs.
4760	8" x 12"	8-1/2" x 12-1/2"	1	4 lbs.
4760	10" x 10"	10-1/2" x 10-1/2"	1	4 lbs.
4760	12" x 12"	12-1/2" x 12-1/2"	1	5.5 lbs.
4760	12" x 16"	12-1/2" x 16-1/2"	1	6 lbs.
4760	12" x 18"	12-1/2" x 18-1/2"	1	6.5 lbs.
4760	12" x 24"	12-1/2" x 24-1/2"	2	9.5 lbs.
4760	14" x 14"	14-1/2" x 14-1/2"	1	6 lbs.
4760	14" x 20"	14-1/2" x 20-1/2"	2	8 lbs.
4760	14" x 24"	14-1/2" x 24-1/2"	2	15 lbs.
4760	15" x 15"	15-1/2" x 15-1/2"	1	6.5 lbs.
4760	16" x 16"	16-1/2" x 16-1/2"	1	7.5 lbs.
4760	16" x 20"	16-1/2" x 20-1/2"	2	8.5 lbs.
4760	16" x 24"	16-1/2" x 24-1/2"	2	10 lbs.
4760	18" x 18"	18-1/2" x 18-1/2"	3	9 lbs.
4760	18" x 24"	18-1/2" x 24-1/2"	5	12 lbs.
4760	18" x 36"	18-1/2" x 36-1/2"	3	16 lbs.
4760	20" x 20"	20-1/2" x 20-1/2"	3	11 lbs.
4760	20" x 24"	20-1/2" x 24-1/2"	3	13 lbs.
4760	20" x 30"	20-1/2" x 30-1/2"	5	15 lbs.
4760	22" x 22"	22-1/2" x 22-1/2"	3	12 lbs.
4760	22" x 30"	22-1/2" x 30-1/2"	3	16 lbs.
4760	24" x 24"	24-1/2" x 24-1/2"	3	15 lbs.
4760	24" x 30"	24-1/2" x 30-1/2"	6	17 lbs.
4760	24" x 36"	24-1/2" x 36-1/2"	5	20.5 lbs.
4760	24" x 48"	24-1/2" x 48-1/2"	7	28 lbs.
4760	30" x 30"	30-1/2" x 30-1/2"	7	21.5 lbs.
4760	32" x 32"	32-1/2" x 32-1/2"	7	23 lbs.
4760	36" x 36"	36-1/2" x 36-1/2"	8	31.5 lbs.
4760	36" x 48"	36-1/2" x 48-1/2"	9	45 lbs.
4760	48" x 48"	48-1/2" x 48-1/2"	11	58 lbs.

DRAWING NUMBER  
**S4760 BS**

SIZE  
**A**

SCALE:  
**NONE**

DATE:  
**3-5-15**

APPROVED BY:  
**SJM**

CHECKED BY:  
**JM**

DRAWN BY:  
**TBW**

**4760 BS**

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	<b>FIGURE NUMBER</b> <b>4760 BS</b>
------	------	-------------	----	---------	---------------	-------------------	--