





C	 JAY R. SMITH MFG. CO.® <small>MEMBER OF MORRIS GROUP INTERNATIONAL POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com</small>	 <small>MEMBER OF:</small>	 <small>MEMBER OF:</small>	 <small>MEMBER OF:</small>	LOCATION
----------	---	--	--	--	-----------------

DRYWALL ACCESS DOORS

DRAWING NUMBER **S4762**
 SIZE **A**
 SCALE: **NONE**
 DATE: **6-12-15**
 APPROVED BY: **SJM**
 CHECKED BY: **JM**
 DRAWN BY: **TBW**
4762
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA




REGULARLY FURNISHED:


Doors are ideally suited for new installations or for remodeling, in masonry, tile, wood or other wall and ceiling surfaces. Door features rounded safety corners. Door and frame are fabricated from 16 gauge, type 304, stainless steel with a satin finish on exposed surface. Frame is one piece construction, 1" wide and provides perfect concealment of the rough wall opening. Wall frame is provided with 1/4" mounting holes for fastening within the furred spaces allowing faster installation and fixing maximum clearance. Concealed pivoting rod hinge prevents distortion and closes door squarely. Doors 24" or larger are provided with a continuous piano hinge. Latch is screwdriver operated.

GUIDE SPECIFICATIONS:

Provide 4762 Series, Drywall Access Doors (specify options). Access door and frame shall be fabricated from 16 gauge, type 304, stainless steel with a satin finish on exposed surface. The door shall have rounded safety corners and a concealed pivoting rod hinge. Frame shall be one piece construction with no miters or welds on the face. Latch shall be screwdriver operated.

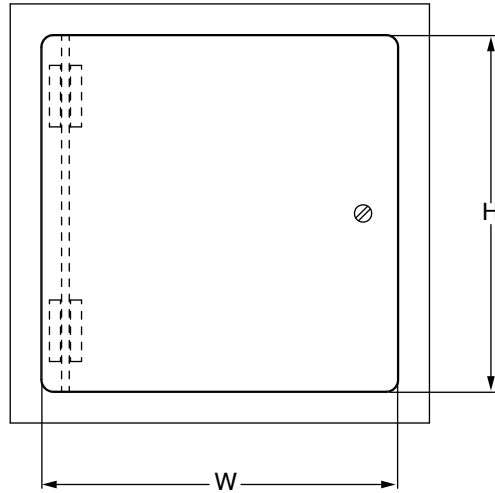

FRONT VIEW

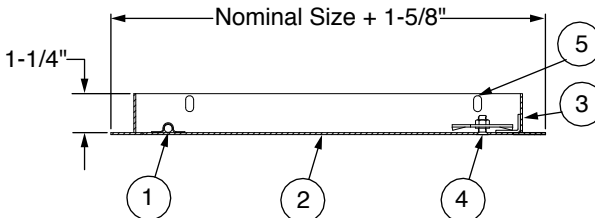

SIDE VIEW

- ① Concealed pivoting rod hinge
- ② Door
- ③ Frame
- ④ Screwdriver operated latch
- ⑤ Mounting holes

VARIATIONS:

- Allen Key Latch -AKL
- Cylinder Lock (one per door) -CL
- 16 Gauge, Galvannealed Steel, Prime Coated Construction. (See Fig. 4760)

C	02-25-20	Revised Reg. Furn., Guide Specs.	MW	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
B	5-21-19	Revised Reg. Furn., Guide Specs.	MW	JM			4762
A	7-25-18	Revised Reg. Furn., Guide Specs.	TBW	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			



LOCATION

DRYWALL ACCESS DOORS

STANDARD AVAILABLE SIZES
 Special sizes available upon request

	NOMINAL DOOR SIZE (W X H)	CEILING OPENING (minimum required)	LATCHES	WEIGHT
4762	6" x 6"	6-1/2" x 6-1/2"	1	3 lbs.
4762	8" x 8"	8-1/2" x 8-1/2"	1	3 lbs.
4762	8" x 12"	8-1/2" x 12-1/2"	1	4 lbs.
4762	10" x 10"	10-1/2" x 10-1/2"	1	4 lbs.
4762	12" x 12"	12-1/2" x 12-1/2"	1	5.5 lbs.
4762	12" x 16"	12-1/2" x 16-1/2"	1	6 lbs.
4762	12" x 18"	12-1/2" x 18-1/2"	1	6.5 lbs.
4762	12" x 24"	12-1/2" x 24-1/2"	2	9.5 lbs.
4762	14" x 14"	14-1/2" x 14-1/2"	1	6 lbs.
4762	14" x 20"	14-1/2" x 20-1/2"	2	8 lbs.
4762	14" x 24"	14-1/2" x 24-1/2"	2	15 lbs.
4762	15" x 15"	15-1/2" x 15-1/2"	1	6.5 lbs.
4762	16" x 16"	16-1/2" x 16-1/2"	1	7.5 lbs.
4762	16" x 20"	16-1/2" x 20-1/2"	2	8.5 lbs.
4762	16" x 24"	16-1/2" x 24-1/2"	2	10 lbs.
4762	18" x 18"	18-1/2" x 18-1/2"	3	9 lbs.
4762	18" x 24"	18-1/2" x 24-1/2"	5	12 lbs.
4762	18" x 36"	18-1/2" x 36-1/2"	3	16 lbs.
4762	20" x 20"	20-1/2" x 20-1/2"	3	11 lbs.
4762	20" x 24"	20-1/2" x 24-1/2"	3	13 lbs.
4762	20" x 30"	20-1/2" x 30-1/2"	5	15 lbs.
4762	22" x 22"	22-1/2" x 22-1/2"	3	12 lbs.
4762	22" x 30"	22-1/2" x 30-1/2"	3	16 lbs.
4762	24" x 24"	24-1/2" x 24-1/2"	3	15 lbs.
4762	24" x 30"	24-1/2" x 30-1/2"	6	17 lbs.
4762	24" x 36"	24-1/2" x 36-1/2"	5	20.5 lbs.
4762	24" x 48"	24-1/2" x 48-1/2"	7	28 lbs.
4762	30" x 30"	30-1/2" x 30-1/2"	7	21.5 lbs.
4762	32" x 32"	32-1/2" x 32-1/2"	7	23 lbs.
4762	36" x 36"	36-1/2" x 36-1/2"	8	31.5 lbs.
4762	36" x 48"	36-1/2" x 48-1/2"	9	45 lbs.
4762	48" x 48"	48-1/2" x 48-1/2"	11	58 lbs.

DRAWING NUMBER
S4762 BS

SIZE
A

SCALE:
NONE

DATE:
6-12-15

APPROVED BY:
SJM

CHECKED BY:
JM

DRAWN BY:
TBW

4762 BS

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 4762 BS
------	------	-------------	----	---------	---------------	-------------------	---------------------------------