

ACOUSTICAL TILE ACCESS DOOR

DRAWING NUMBER
S4772

SIZE
A

SCALE:
NONE

DATE:
3-4-15

APPROVED BY:
SJM



CHECKED BY:
JM

DRAWN BY:
TBW

4772

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

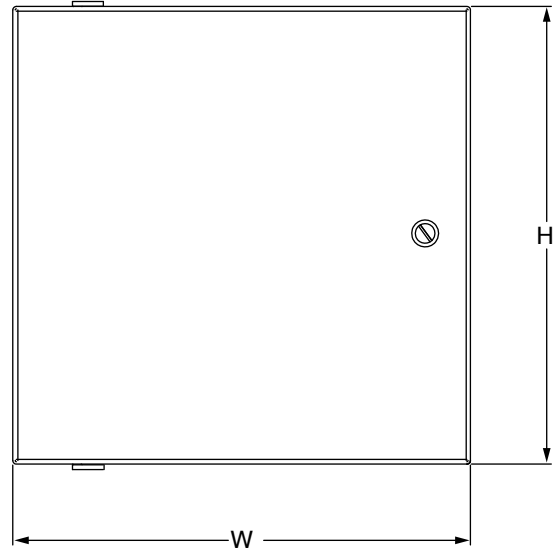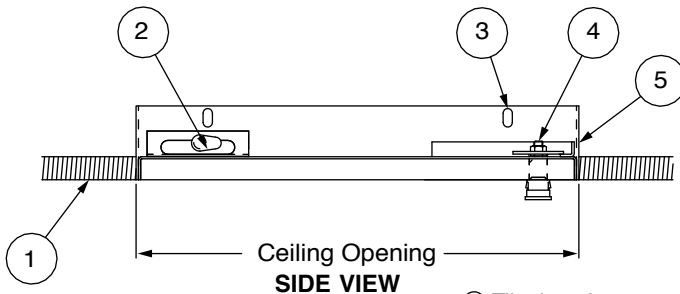

- ① Tile, by others
- ② Concealed Hinge
- ③ Mounting Holes
- ④ Screwdriver Operated Latch
- ⑤ Frame

REGULARLY FURNISHED:

Doors are designed for use with acoustical tile or gypsum board walls and ceilings. The door is engineered to install flush, virtually concealed. Door is recessed 5/8" to accept acoustical tile or gypsum board. Door is 16 gage and frame is 12 gage, galvanized steel with a prime coat finish. Concealed hinge operates completely out of sight so that only the metal thickness of the door and frame is visible. Latch is screwdriver operated.

Guide Specification:

Provide 4772 Series, Acoustical Tile Access Door (specify options). Access door shall be fabricated from 16 gage and frame from 12 gage, galvanized steel with a prime coat finish. Door shall be recessed 5/8" to accept acoustical tile or gypsum board. Hinge shall be concealed type. Latch shall be screwdriver operated.

STANDARD AVAILABLE SIZES

Special sizes available upon request

NOMINAL DOOR SIZE (WXH)	CEILING OPENING (minimum required)	LATCHES	WEIGHT
4772 8" x 8"	8-1/8" x 8-1/8"	1	4 lbs.
4772 12" x 12"	12-1/8" x 12-1/8"	1	5.5 lbs.
4772 12" x 24"	12-1/8" x 24-1/8"	2	9.5 lbs.
4772 16" x 16"	16-1/8" x 16-1/8"	2	8.5 lbs.
4772 18" x 18"	18-1/8" x 18-1/8"	2	10 lbs.
4772 24" x 24"	24-1/8" x 24-1/8"	2	16 lbs.
4772 24" x 36"	24-1/8" x 36-1/8"	3	24.5 lbs.

VARIATIONS:

- Allen Key Latch -AKL
- Galvanized Drywall Bead -GB
- Cylinder Lock (one per door) -CL
- Stainless Steel Construction -SS
Type 304 No.4 Satin Finish

WEIGHT
POUNDS

VOLUME
CUBIC FEET

FIGURE NUMBER

4772

REV.	DATE	DESCRIPTION	BY	CKD. BY