


STAINLESS STEEL GREASE INTERCEPTORS

STAINLESS STEEL GREASE INTERCEPTOR WARRANTY:

Smith stainless steel grease interceptors are warranted against defective materials and workmanship for a period of ten years from the date of purchase. We will replace, free of charge, any Smith stainless steel grease interceptor proven defective that was properly installed, properly maintained, and used in accordance with recommended instructions. We shall not be responsible for any labor charges or any loss, injury or damages whatsoever, including incidental or consequential damages, or for the replacement of gaskets and hardware. We also are not responsible for damage caused by the use of caustic cleaning solutions, such as chlorinated cleansers, sanitizers or bleach of any kind. THE FOREGOING EXPRESS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED IN FACT OR IMPLIED BY LAW.

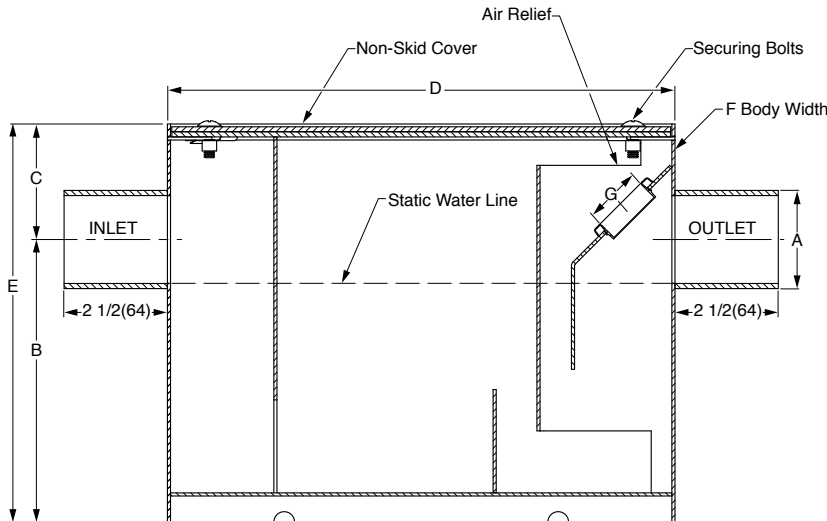

Figs. 8007-SS thru 8050-SS carry the Plumbing and Drainage Institute Certification Seal Certifying conformance to Grease Interceptor Standard PDI-G101.

FIG. NO.	GPM FLOW RATE (L/M)	GREASE CAP LBS (KG)	A	B	C	D	E	F (WIDTH)	G (Plug Size)
8004Y02-SS	4(15)	8(3.6)	02(50)	6 7/8(175)	2 3/4(70)	12 1/4(311)	9 5/8(245)	13(330)	1 1/2(38)
8007Y02-SS	7(26)	14(6)	02(50)	7 3/4(195)	3 1/4(83)	13 5/8(346)	11(280)	14 1/2(368)	1 1/2(38)
8010Y02-SS	10(38)	20(9)	02(50)	8 3/4(220)	3 5/8(92)	15 (381)	12 3/8(315)	15 3/4(400)	1 1/2(38)
8015Y02-SS	15(57)	30(13.6)	02(50)	11 1/4(285)	3 1/2(89)	17 3/8(441)	14 3/4(375)	18 1/4(464)	1 1/2(38)
8020Y03-SS	20(75)	40(18)	03(75)	12 3/4(325)	4 (100)	19 3/8(492)	16 3/4(425)	20 1/4(514)	1 1/2(38)
8025Y03-SS	25(95)	50(22.6)	03(75)	14 1/4(360)	4 1/8(105)	21(533)	18 3/8(468)	21 3/4(552)	1 1/2(38)
8035Y03-SS	35(132)	70(32)	03(75)	14 1/2(370)	4 1/2(115)	22 3/8(568)	19(485)	23 1/4(591)	1 1/2(38)
8050Y03-SS	50(189)	100(45)	03(75)	14 1/2(370)	5 1/4(135)	31 5/8(803)	19 3/4(500)	23 1/4(591)	1 1/2(38)
LOW TYPE									
8120Y03-SS	20(75)	40(18)	03(75)	7(180)	3 3/4(95)	39 1/2(1010)	10 1/2(265)	20 3/4(527)	1 1/2(38)
8135Y03-SS	35(132)	70(32)	03(75)	7(180)	4 3/4(120)	52 1/4(1327)	11 3/4(300)	26 3/4(680)	1 1/2(38)
8150Y03-SS	50(189)	100(45)	03(75)	10(254)	5 15/16(151)	50 1/4(1276)	15 15/16(404)	26 3/4(680)	1 1/2(38)

REGULARLY FURNISHED:
 Fabricated Type 304 Stainless Steel Interceptor with Cast Iron External Flow Control Fitting and NO-HUB Inlet & Outlet Connections.

GENERAL NOTES:

- It is the responsibility of the installer to check all parts (internal and external) to verify they are in their proper operating order and location.
- Whenever an interceptor is to be installed suspended in a floor slab with a cradle or independently, proper support is essential for safety and functional integrity of the installation. Supports/support system shall be of sufficient strength and proper design for the purpose intended and meet the approval of the architect and structural engineer. Jay R. Smith Mfg. Co. is not responsible for the design or recommendation of such supports. Upon request, Jay R. Smith Mfg. Co. will provide the weight of the specific unit. Additional weight must be added to compensate for the weight of the liquid/grease when full and in the flowing mode of operation.
- Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S8000-SS SERIES
 SIZE: A
 SCALE: NONE
 DATE: 4-25-17
 APPROVED BY: SJM
 CHECKED BY: JIM
 DRAWN BY: TBW
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

D	7-25-18	Removed Notations	TBW	DP	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 8000-SS SERIES
C	5-15-18	Revised Note	TBW	CL			
B	11-17-17	Added CSA	TBW	SJM			
A	8-11-17	Added PDI Certification Seal	TBW	SJM			
REV.	DATE	DESCRIPTION	BY	CKD. BY			