


FLOOR DRAINS

FIG. 2130 MEDIUM DUTY FLOOR DRAIN WITH 12" ROUND TOP

FUNCTION: Used in moderate traffic areas where waste water contains no sediment or debris and floor construction requires a shallow drain. Body flange and flashing collar serve as anchor in on-grade locations and as flashing clamp when installed in waterproof floors.

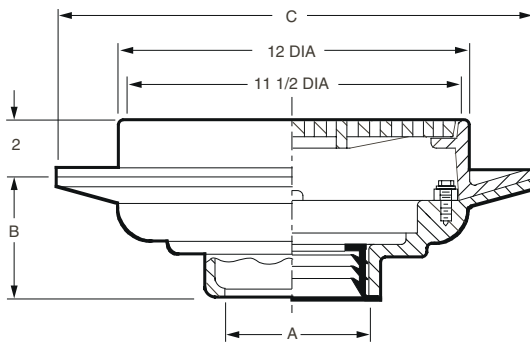

A OUTLET SIZE	TOP SIZE	FREE AREA SQ IN	C DIA.	↑DUCO CI	DUCO CI PB TOP	DUCO CI NB TOP	APPROX. WEIGHT LBS
02, 03, 04"	12"	28.5	16"	1,046.00	1,695.00	1,797.00	45
05, 06"	12"	28.5	16"	1,046.00	1,695.00	1,797.00	45

REGULARLY FURNISHED: Duco Cast Iron Body and Flashing Collar with Cast Iron Bar Grate.

OUTLET VARIATIONS (Specify type of outlet and pipe size in inches.)

Outlet Type	Outlet Designation Outlet Type/Pipe Size	"B" Body HT. DIM.	ADD
Inside Caulk	C02, C03, C04, C05, C06	3 3/4"	N/C
Speedi-Set SW	Not Available		Specify Fig. 2131
Speedi-Set XH	Not Available		Specify Fig. 2131
Threaded	T02, T03, T04, T05, T06	3 3/4"	77.00
No-Hub	Not Available		Specify Fig. 2131

OPTIONS:

OPTION	ADD
-B Sediment Bucket (Caulk & Threaded)	255.00
-D Dome Grate, CI	138.00
-DG Deflector Grate, CI	397.00
-DID Drain Installation Device	356.00
-DNB Dome Grate, add to CI	1,238.00
-DPB Dome Grate, add to CI	1,063.00
-FBSCI Flat Bottom Strainer, CI	59.00
-FP Frost Proof Bucket	300.00
-G Galvanized CI	728.00
-H Hinged Grate	255.00
-M Ductile Iron Grate	260.00
-S Square Top (Add for CI only. For NB or PB, see below)	343.00
-SC Solid Scoriated Cover	582.00
-SNB Square Top, add to CI	1,238.00
-SPB Square Top, add to CI	1,073.00
-U Vandal Proof Grate	146.00


NOTE: Trap Primer not available, specify 2131.

FLOOR DRAINS

FIG. 2131 MEDIUM DUTY FLOOR DRAIN WITH 12" ROUND TOP

FUNCTION: Used in moderate traffic areas where waste water contains no sediment or debris and floor construction requires a shallow drain. Body flange and flashing collar serve as anchor in on-grade locations and as flashing clamp when installed in waterproof floors.

2131
Same as
2130 but
with deep
body

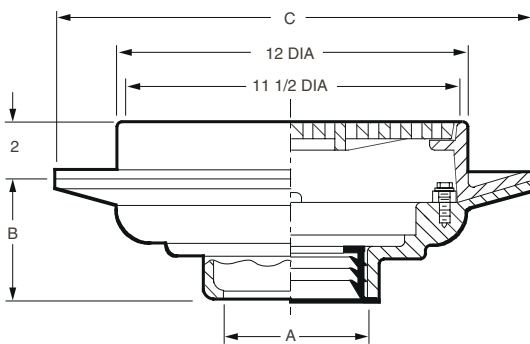

A OUTLET SIZE	TOP SIZE	FREE AREA SQ IN	C DIA.	↑DUCO CI	DUCO CI PB TOP	DUCO CI NB TOP	APPROX. WEIGHT LBS
02, 03, 04"	12"	28.5	15 1/4"	1,272.00	1,921.00	2,023.00	55
05, 06"	12"	28.5	15 1/4"	1,272.00	1,921.00	2,023.00	55

REGULARLY FURNISHED: Duco Cast Iron Body and Flashing Collar with Cast Iron Bar Grate.

OUTLET VARIATIONS (Specify type of outlet and pipe size in inches.)

Outlet Type	Outlet Designation Outlet Type/Pipe Size	"B" Body HT. DIM.	ADD
Inside Caulk	C02, C03, C04, C05, C06	5"	N/C
Speedi-Set SW	L02, L03, L04	5"	N/C
Speedi-Set XH	LXH02, LXH03, LXH04	5"	N/C
Threaded	T02, T03, T04	3 3/4"	77.00
No-Hub	Y02, Y03, Y04, Y05, Y06	5"	N/C

OPTIONS:

OPTION	ADD
-B Sediment Bucket	255.00
-D Dome Grate, CI	138.00
-DG Deflector Grate, CI	397.00
-DID Drain Installation Device	356.00
-DNB Dome Grate, add to CI	1,238.00
-DPB Dome Grate, add to CI	1,063.00
-FBSCI Flat Bottom Strainer, CI	59.00
-FP Frost Proof Bucket	367.00
-G Galvanized CI	728.00
-H Hinged Grate	255.00
-M Ductile Iron Grate	260.00
-P Trap Primer Conn.	163.00
-S Square Top (Add for CI only. For NB or PB, see below)	343.00
-SC Solid Scoriated Cover	582.00
-SNB Square Top, add to CI	1,238.00
-SPB Square Top, add to CI	1,073.00
-U Vandal Proof Grate	146.00