


## FLOOR DRAINS

### WITH 8 1/2" (215) ROUND ADJUSTABLE TOPS

#### WIDE FLANGE DECK DRAIN WITH ADJUSTABLE LIP DIMENSION

**FUNCTION:** For use in floors where waterproof traffic bearing covering is applied. Top is adjustable to various floor covering thicknesses.

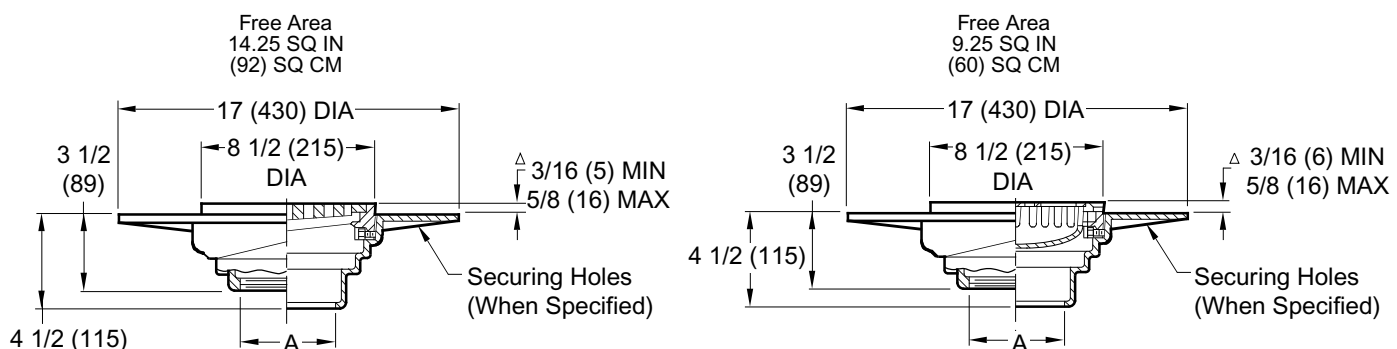

A (Pipe Size) = 02(50), 03(80) or 04(100)

Fig. DX2312C ... LESS BUCKET  
 Fig. DX2312T ... LESS BUCKET

Fig. DX2312CB ... WITH "SAFE-SET" BUCKET  
 Fig. DX2312TB ... WITH "SAFE-SET" BUCKET

**NOTE:** If waterproof deck covering thickness is greater (or less) than the dimension shown, lip dimension must be specified. Roughing dimensions of the body must be adjusted accordingly. Drain body should be set low enough to permit "dimpling" of area surrounding drain.

Δ add 3/16" (5) when bronze top is specified.

**REGULARLY FURNISHED:**  
 Duco Cast Iron Body with Cast Iron Adjustable Top.

- VARIATIONS:**
- NO-HUB Adaptor (Specify Fig. 2646Y)
  - Securing Holes -SH
  - Vandal Proof Grate -U
  - T Threaded Outlet

- OPTIONAL MATERIALS:**
- Galvanized Cast Iron -G
  - Nickel Bronze Top -NB
  - Polished Bronze Top -PB

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: **DX2312**  
 SIZE: **A**  
 SCALE: **NONE**  
 DATE: **5-17-85**  
 APPROVED BY: **TD**  
 CHECKED BY: **TD**  
 DRAWN BY: **PJ**  
**DX2312, DX2312B**  
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

<b>B</b>	4-9-97		<b>EMB</b>	<b>BS</b>	WEIGHT POUNDS	VOLUME CUBIC FEET	<b>FIGURE NUMBER</b>
<b>A</b>	9-30-93	Added Millimeters Submittal Update	<b>EMB</b>	<b>BS</b>			<b>DX2312, DX2312B</b>
REV.	DATE	DESCRIPTION	BY	CKD. BY			