

C

SMITH® JAY R. SMITH MFG. CO.®
 DIVISION OF SMITH INDUSTRIES, INC.
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com




LOCATION

FUNNEL-CEPTOR® INDIRECT WASTE DRAINS

WITH ADJUSTABLE ROUND TOPS MEDIUM DUTY GRATE WITH ROUND FUNNEL

FUNCTION: Used to receive the drip, condensate or waste water from indirect waste lines. The funnel prevents splashing and directs the waste into the drain. The exposed portion of grate serves as drain for any other waste on the floor. The funnel is attached to the grate by means of concealed screws and it may be moved to any grate location desired. The round funnel is recommended for single pipe use only. Adjustable top permits accurate positioning of the grate, as necessary, to meet the finished floor level.

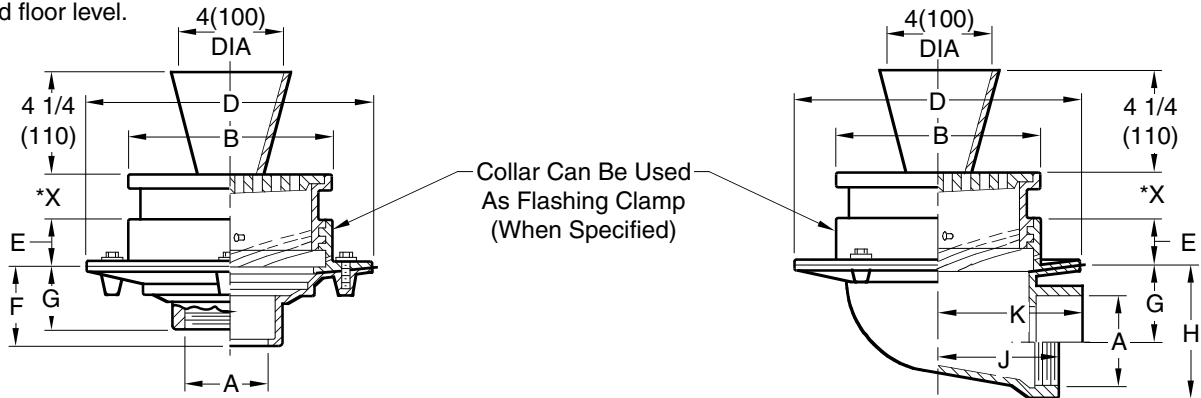

8 1/2"(215) 12"(305) ... TOP SIZE = B DIA ... 8 1/2"(215) 12"(305)

Fig. ... 3610C ... 3615C ... CAULK OUTLET ... Fig. ... 3620C ... 3625C
 Fig. ... 3610T ... 3615T ... THREADED OUTLET ... Fig. ... 3620T ... 3625T

BOTTOM OUTLET DIMENSIONS

A SIZE	B DIA	D DIA	E	F	G THD.	MIN	*X MAX
02(50),03(80), 04(100)	8 1/2 (215)	11 1/2 (290)	2 (50)	3 3/4 (95)	2 (50)	1 1/4 (32)	2 3/4 (70)
02(50),03(80),04(100), 05(125) or 06(150)	12 (305)	15 1/4 (390)	2 1/2 (64)	5 (125)	3 3/4 (95)	1 5/8 (41)	2 7/8 (73)

*Add 1/4" (6) when bronze top is specified.

SIDE OUTLET DIMENSIONS

A SIZE	B DIA	D DIA	E	G	H	J	K	MIN	*X MAX
02(50) 03(80) 04(100)	8 1/2 (215)	12 (305)	2 (50)	4 1/4(110) 3 3/4(95) 3 1/4(83)	6 (150)	4 (100)	5 1/2 (140)	1 1/4 (32)	2 3/4 (70)
02(50) 03(80) 04(100)	12 (305)	15 1/4 (390)	2 1/2 (64)	6 1/2(165) 6(150) 5 1/2(140)	9 (230)	6 (150)	6 3/4 (170)	1 5/8 (41)	2 7/8 (73)
05(125) 06(150)	12 (305)	15 3/4 (400)	2 1/2 (64)	5(125) 4 1/2(115)	9 (230)	6 3/4 (170)	7 3/4 (195)		

REGULARLY FURNISHED:

Duco Cast Iron Flanged Receptor and Flashing Collar with Adjustable Top, Bar Grate and Funnel.

NOTE: Dimensions shown in parentheses are in millimeters.

VARIATIONS:

- L Speedi-Set Service Weight (Available on Bottom Outlet Drains) 2(50), 3(80) & 4"(100) sizes only
- LXH Speedi-Set Extra Heavy (Available on Bottom Outlet Drains) 2(50), 3(80) & 4"(100) sizes only
- Secured Grate -SG
- Sediment Bucket -B
- 6"(150) Dia. Funnel (Fig. 3581) -6
- 6(150) x 2 1/2(64) x 1"(25) High Oval Funnel (Fig. 3590)
- Vandal Proof Secured Grate -U
- Y NO-HUB Outlet (Available on Bottom Outlet Drains)

NOTE: 2(50), 3(80) & 4"(100) sizes with 15 1/4(390) "D" Dim. require a transition collar (not shown in above illustration) which fits between the body and collar. Above illustration is typical for the 5(125) & 6"(150) sizes (3625 only).

OPTIONAL MATERIALS:

- Chrome Plated Grate and Funnel -CP
- Nickel Bronze Grate and Funnel -NB
- Polished Bronze Grate and Funnel -PB

DRAWING NUMBER
S3610

SIZE
A

SCALE:
NONE

DATE:
9-19-85

APPROVED BY:
SJM

CHECKED BY:
JD

DRAWN BY:
VGD

3610,3615,3620,3625

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

C	11-27-95	Added Millimeters	EMB	BS	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 3610, 3615, 3620, 3625
B	7-22-94	Submittal Update	EMB	BS			
A	2-28-91	Chg'd Dim F/Fig. 3625	EMB	JCS			
REV.	DATE	DESCRIPTION	BY	CKD. BY			